

## Supplementary instructions

### Mounting bracket KV 31

For tubes with  $\varnothing$  50 ... 100 mm

30° diagonal irradiation



Document ID: 41863



# VEGA

Contents

- 1 Product description
- 2 Mounting
- 3 Supplement
  - 3.1 Technical data ..... 12
  - 3.2 Dimensions ..... 13
  - 3.3 Industrial property rights..... 17
  - 3.4 Trademark ..... 17

# 1 Product description

The KV 31 is a mounting bracket for the radiation-based measuring system MINITRAC. It is suitable for pipes of 50 ... 100 mm (1.97 ... 3.94 in) diameter.

## Mounting brackets KV 31 - 30°

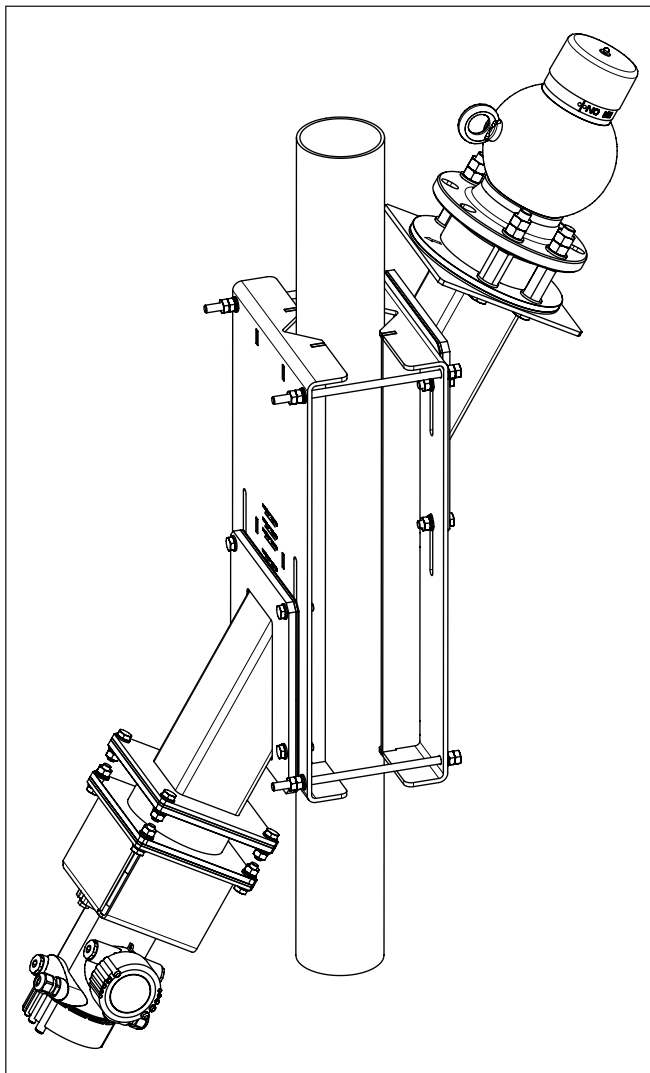


Fig. 1: Mounting bracket with 30° inclined irradiation

## Scope of delivery

The mounting bracket KV 31 contains all necessary parts for fastening a radiation-based measuring system to tubes with a diameter of 50 ... 100 mm (1.97 ... 3.94 in).

The two halves of the mounting bracket are already premounted.

Check the completeness of the mounting bracket according to the assembly drawings of chapter "*Mounting*".

**Collimator - optional**

A collimator can be mounted on the sensor side, the source holder side or on both sides of the mounting bracket.

A collimator directs the radiation directly to the sensor and absorbs the undirected scattered radiation.

## 2 Mounting

### Operating instructions

Take note of the operating instructions of the corresponding sensor MINITRAC and the source holder.

### Mounting bracket for 30° inclined irradiation

Take note of the following mounting instructions:

- Mount the bracket first, then the sensor and the source holder
- The marking arrow on the console (source holder side) and the transport lug of the source holder must point in the same direction after mounting.
- Make sure that the two clamps of the bracket are parallel to each other. Do this by measuring the lateral distances between the clamps
- To avoid injuries, shorten the threaded rods of the brackets to the suitable length after mounting

### Mounting - Mounting bracket, sensor side

This half of the mounting bracket is already premounted when being shipped.

When retrofitting a collimator etc., mount the sensor side of the mounting bracket according to the following assembly drawing.

To facilitate mounting, mount the bracket first, then the sensor and the source holder.

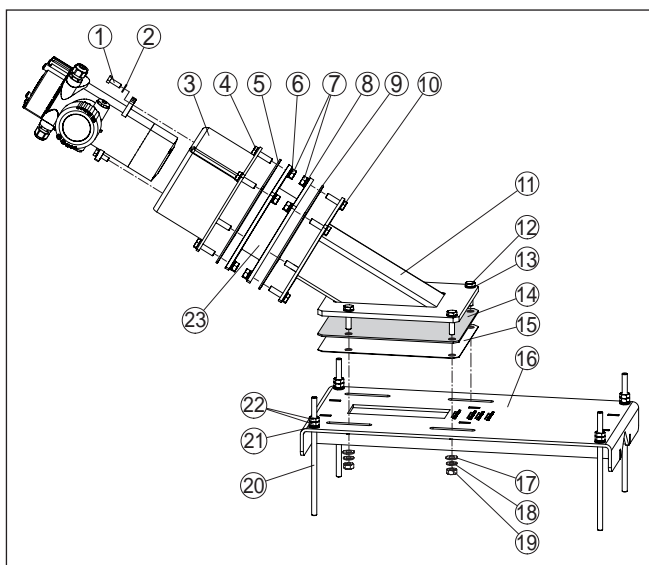


Fig. 2: Mounting brackets - sensor side (MINITRAC)

- 1 Hexagon screw M8 (2 pieces)
- 2 Washer for M8 (2 pieces)
- 3 Console - sensor side (MINITRAC)
- 4 Hexagon screw M8 (4 pieces)
- 5 Seal - collimator (sensor side)
- 6 Washer for M8 (4 pieces), (optional)
- 7 Hexagon nut M8 - (8 pieces), (optional)
- 8 Washer for M8 (4 pieces)
- 9 Seal - collimator (sensor side), (optional)
- 10 Hexagon screw M8 (4 pieces)
- 11 Console - sensor side (MINITRAC)
- 12 Hexagon screw M10 (4 pieces)
- 13 Washer for M10 (4 pieces)
- 14 Seal - bracket (sensor side)
- 15 Cover plate
- 16 Bracket - sensor side (MINITRAC)
- 17 Washer for M10 (4 pieces)
- 18 Spring rings for M10 (4 pieces)
- 19 Hexagon nut M10 (4 pieces)
- 20 Threaded rod M10 x 360 mm (4 pieces)
- 21 Washer for M10 (4 pieces)
- 22 Hexagon nut/Counter nut M10 (8 pieces)
- 23 Collimator - Sensor side (MINITRAC), (optional)

### Mounting - Mounting bracket, radiator side

This half of the mounting bracket is already premounted when being shipped.

When retrofitting a collimator etc., mount the sensor side of the mounting bracket according to the following assembly drawing.

To facilitate mounting, mount the bracket first, then the sensor and the source holder.



**Note:**

Mount the components in such a way that the marking arrows of the console (3) and the collimator (1) point in the same direction.

Note the following illustrations.

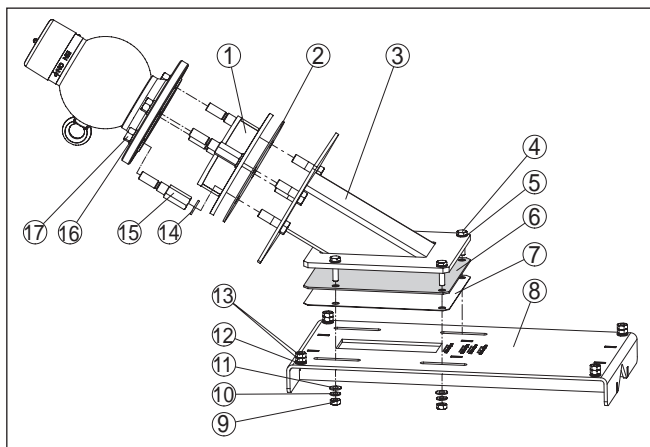


Fig. 3: Mounting bracket - Source holder side

- 1 Collimator - Source holder side (optional)
- 2 Seal - collimator (source holder side), (optional)
- 3 Console - Source holder side
- 4 Hexagon screw M10 (4 pieces)
- 5 Washer for M10 (4 pieces)
- 6 Seal - bracket (sensor side)
- 7 Cover plate
- 8 Clamp - Source holder side
- 9 Hexagon nut M10 (4 pieces)
- 10 Spring rings for M10 (4 pieces)
- 11 Washer for M10 (4 pieces)
- 12 Washer for M10 (4 pieces)
- 13 Hexagon nut/Counter nut M10 (8 pieces)
- 14 Washer for M16 (4 pieces), (optional)
- 15 Distance bolt M16 (4 pieces), (optional)
- 16 Washer for M16 (4 pieces)
- 17 Hexagon nut M16 (4 pieces)

**Note marking arrows**

The marking arrows on the console and the collimator must point in the same direction. After mounting, the transport lug of the source holder must point in the same direction.

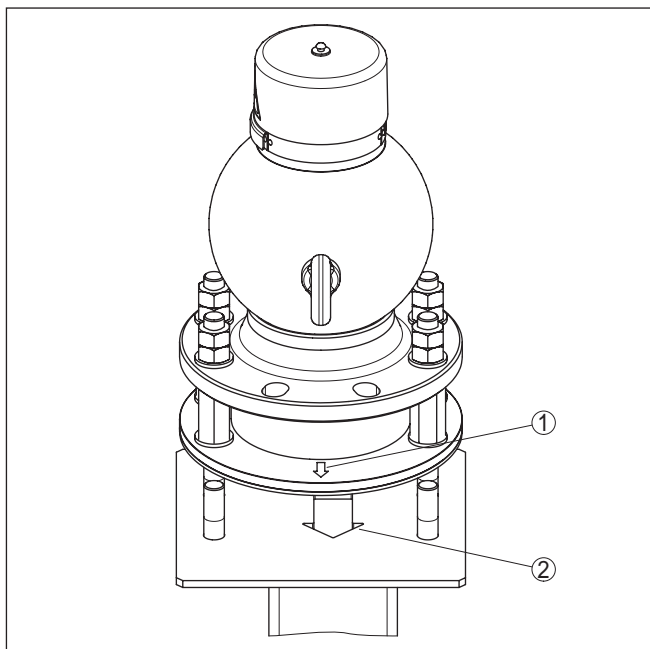


Fig. 4: The marking arrows of the console and the collimator point in the same direction.

- 1 Collimator - Source holder side
- 2 Console - Source holder side

### Adjust mounting bracket



#### Note:

Adjust both sides of the mounting bracket to the respective tube diameter before mounting the mounting bracket to the tube. This facilitates the adjustment.

A later adjustment is difficult due to the weight of the mounting bracket.

1. Loosen the four screw connections until the console can be shifted.
2. Adjust the consoles on the sensor side and the source holder side according to your tube diameter.

Take note of the marking lines on the bracket. The edge of the console must be exactly on the corresponding marking line.



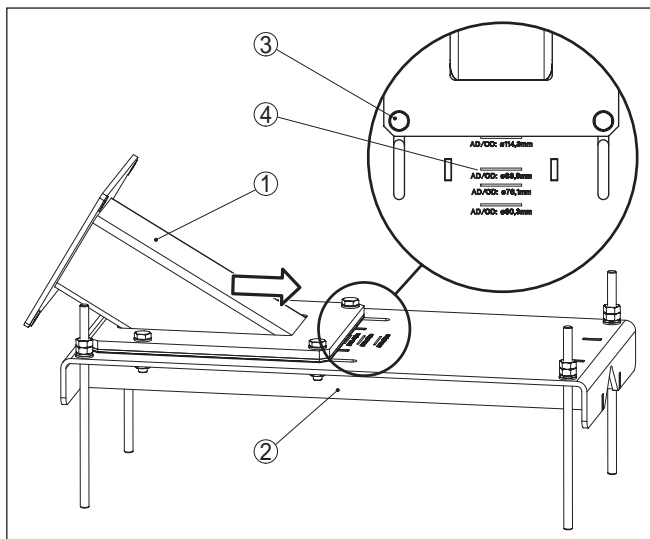


Fig. 5: Adjust mounting bracket

- 1 Console
- 2 Bracket, sensor or source holder side
- 3 Screw connections
- 4 Markings (different tube diameters)

## Installation of the mounting bracket

Mount the bracket according to the following assembly drawing:



### Tip:

The mounting bracket is very heavy. We recommend using a support, eg of wood, as a mounting aid to hold the mounting bracket at the proper height during installation.

1. Before mounting, check if the adjustment with respect to the tube diameter is correct on both sides of the mounting bracket and if the marking arrows of the console and the collimator (optional) point in the same direction.
2. Make sure that the two clamps of the bracket are parallel to each other. Do this by measuring the lateral distances between the clamps.
3. Tighten the nuts of the threaded rod evenly. Keep the tube diameter and the stability of the tube material in mind. Avoid deformation of the tube through an overtightening of the mounting bracket.  
If you have the impression that the tube cannot permanently carry the weight of the mounting bracket, sensor and source container, mount a suitable support below the mounting bracket.
4. Shorten the threaded rods after mounting to avoid injuries.

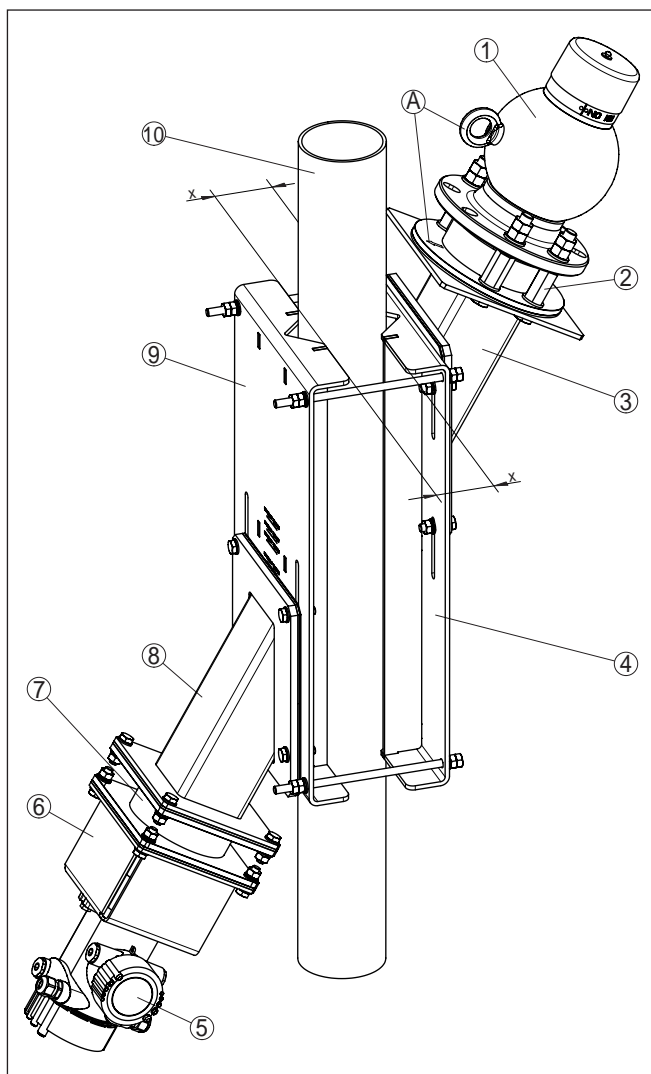


Fig. 6: Mounting bracket for 30° inclined irradiation

- 1 Source holder
- 2 Collimator - Source holder side (optional)
- 3 Console - Source holder side
- 4 Clamp - Source holder side
- 5 Sensor (MINITRAC)
- 6 Console - sensor side (MINITRAC)
- 7 Collimator - Sensor side (optional)
- 8 Detector console - sensor side (MINITRAC)
- 9 Bracket - sensor side (MINITRAC)
- 10 Tube  $\varnothing$  50 ... 100 mm (1.97 ... 3.94 in)
- x Brackets in parallel - distances on both sides the same

A The marking arrow and the eye-bolt in the same direction

### Mount the sensor and source holder

Once the mounting bracket is installed, you can mount the sensor and the source holder.

You can find the torque in the "*Technical data*".



#### **Danger:**

When mounting, make sure that the source holder is reliably switched off.

1. First of all fasten the sensor.
2. Mount the source holder. Use a suitable lifting device and note the respective safety regulations for lifting loads.

## 3 Supplement

### 3.1 Technical data

#### General data

Take note of the information in the operating instructions manual of the installed MINITRAC level sensor and the source holder

Material 316L corresponds to 1.4404 or 1.4435

#### Materials

- |                    |      |
|--------------------|------|
| – Mounting bracket | 316L |
| – Threaded rods    | 316L |

#### Weight (without sensor and source holder)

- |  |                     |
|--|---------------------|
| – Mounting bracket - without collimator            | 47.6 kg (105 lbs)   |
| – Mounting bracket - with collimator sensor side   | 57.8 kg (127.4 lbs) |
| – Mounting bracket - with collimator radiator side | 58.4 kg (128.8 lbs) |
| – Mounting bracket - with collimator both sides    | 68.6 kg (151.3 lbs) |

#### Torques

- |                                 |                                |
|---------------------------------|--------------------------------|
| – Screws - Sensor mounting (M8) | 15 Nm (11.06 lbf ft)           |
| – Nuts (M16)                    | 20 Nm (14.75 lbf ft)           |
| – Threaded rods (M10)           | Dependent on the tube material |

## 3.2 Dimensions

### KV 31, without collimator

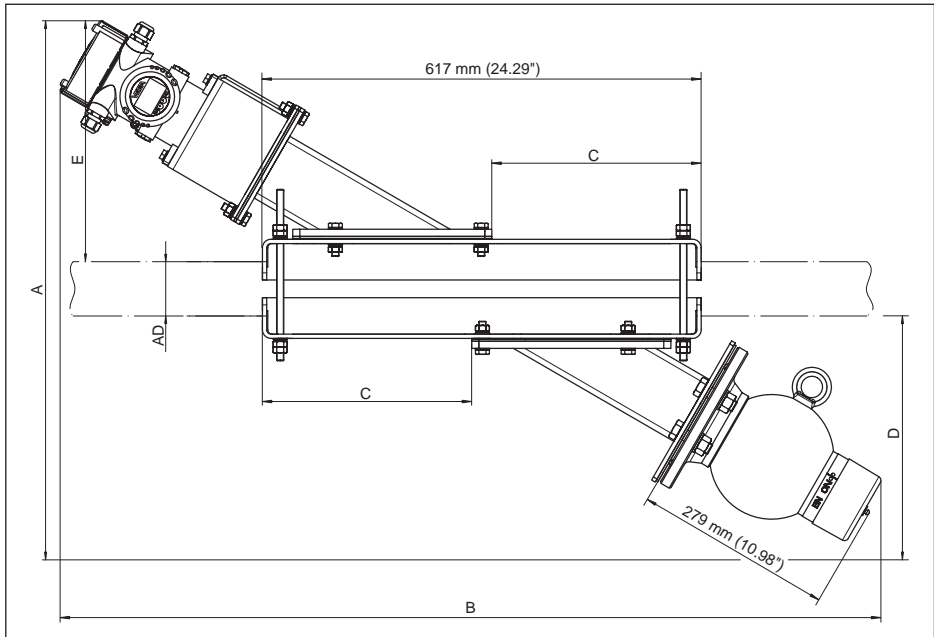


Fig. 7: Mounting bracket without collimator

- A Total width
- AD Tube diameter
- B Total length
- C Adjustment
- D Height - Radiator side
- E Height - Sensor side

Tube DN (in)	Tube diameter (AD)	Total width (A)	Total length (B)	Adjustment (C)	Height - Radiator side (D)	Height - Sensor side (E)
DN 50 (2 in)	ø 60.3 mm (2.37 in)	706 mm (27.8 in)	1116 mm (44 in)	275 mm (10.8 in)	304 mm (12 in)	326 mm (12.9 in)
DN 65 (2.5 in)	ø 73 mm (2.9 in)	728 mm (28.7 in)	1154 mm (45.5 in)	295 mm (11.7 in)	315 mm (12.5 in)	338 mm (13.4 in)
DN 80 (3 in)	ø 88.9 mm (3.5 in)	746 mm (29.4 in)	1186 mm (46.7 in)	310 mm (12.2 in)	324 mm (12.8 in)	347 mm (13.7 in)
DN 100 (4 in)	ø 114.3 mm (4.5 in)	782 mm (30.8 in)	1248 mm (49.2 in)	342 mm (13.5 in)	342 mm (13.5 in)	365 mm (14.4 in)

KV 31, collimator on the sensor side

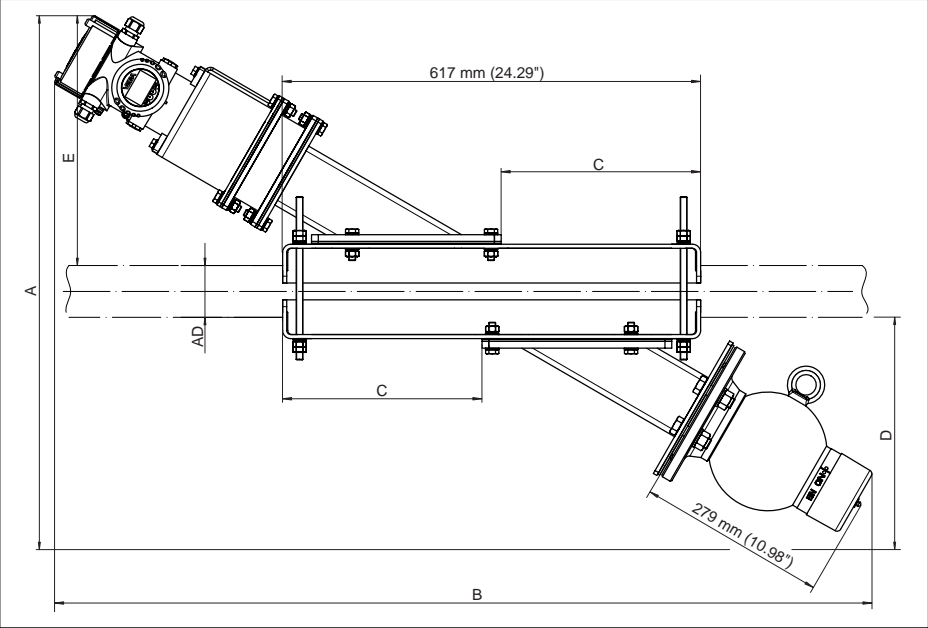


Fig. 8: Mounting bracket with collimator on the sensor side

- A Total width
- AD Tube diameter
- B Total length
- C Adjustment
- D Height - Radiator side
- E Height - Sensor side

Tube DN (in)	Tube diameter (AD)	Total width (A)	Total length (B)	Adjustment (C)	Height - Radiator side (D)	Height - Sensor side (E)
DN 50 (2 in)	ø 60.3 mm (2.37 in)	734 mm (29 in)	1167 mm (46 in)	275 mm (10.8 in)	304 mm (12 in)	357 mm (14.1 in)
DN 65 (2.5 in)	ø 73 mm (2.9 in)	758 mm (29.9 in)	1206 mm (47.5 in)	295 mm (11.7 in)	315 mm (12.5 in)	368 mm (14.5 in)
DN 80 (3 in)	ø 88.9 mm (3.5 in)	775 mm (30.6 in)	1238 mm (48.8 in)	310 mm (12.2 in)	324 mm (12.8 in)	377 mm (14.9 in)
DN 100 (4 in)	ø 114.3 mm (4.5 in)	811 mm (32 in)	1300 mm (51.2 in)	342 mm (13.5 in)	342 mm (13.5 in)	395 mm (15.6 in)

**KV 31, collimator on the source holder side**

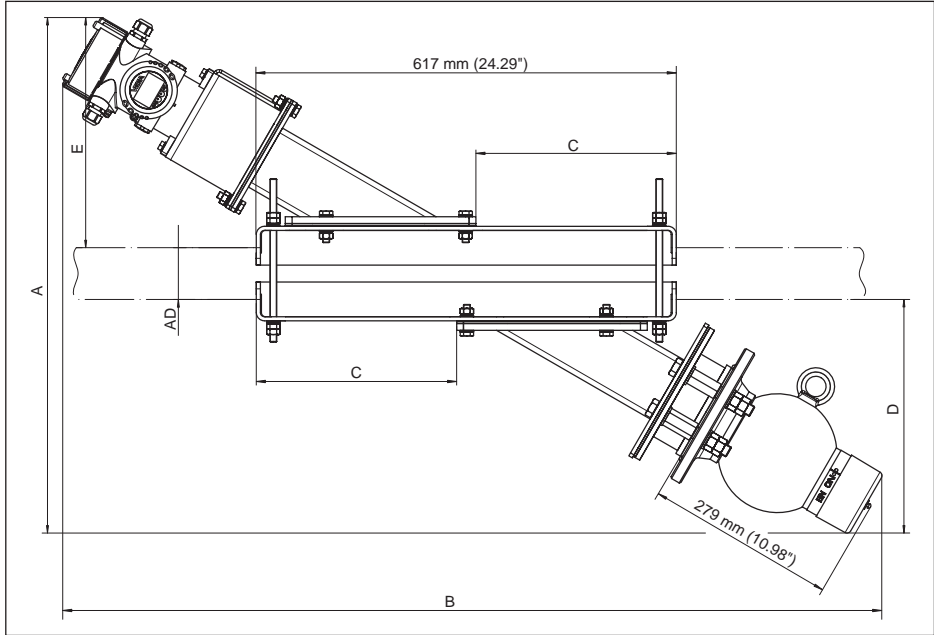


Fig. 9: Mounting bracket with collimator on the source holder side

- A Total width
- AD Tube diameter
- B Total length
- C Adjustment
- D Height - Radiator side
- E Height - Sensor side

Tube DN (in)	Tube diameter (AD)	Total width (A)	Total length (B)	Adjustment (C)	Height - Radiator side (D)	Height - Sensor side (E)
DN 50 (2 in)	ø 60.3 mm (2.37 in)	734 mm (29 in)	1165 mm (45.8 in)	275 mm (10.8 in)	332 mm (13 in)	327 mm (12.9 in)
DN 65 (2.5 in)	ø 73 mm (2.9 in)	757 mm (29.8 in)	1204 mm (47.4 in)	295 mm (11.7 in)	343 mm (13.5 in)	338 mm (13.4 in)
DN 80 (3 in)	ø 88.9 mm (3.5 in)	775 mm (30.6 in)	1235 mm (48.7 in)	310 mm (12.2 in)	352 mm (13.9 in)	347 mm (13.7 in)
DN 100 (4 in)	ø 114.3 mm (4.5 in)	811 mm (32 in)	1297 mm (51.1 in)	342 mm (13.5 in)	370 mm (14.6 in)	365 mm (14.4 in)

KV 31, collimators on both sides

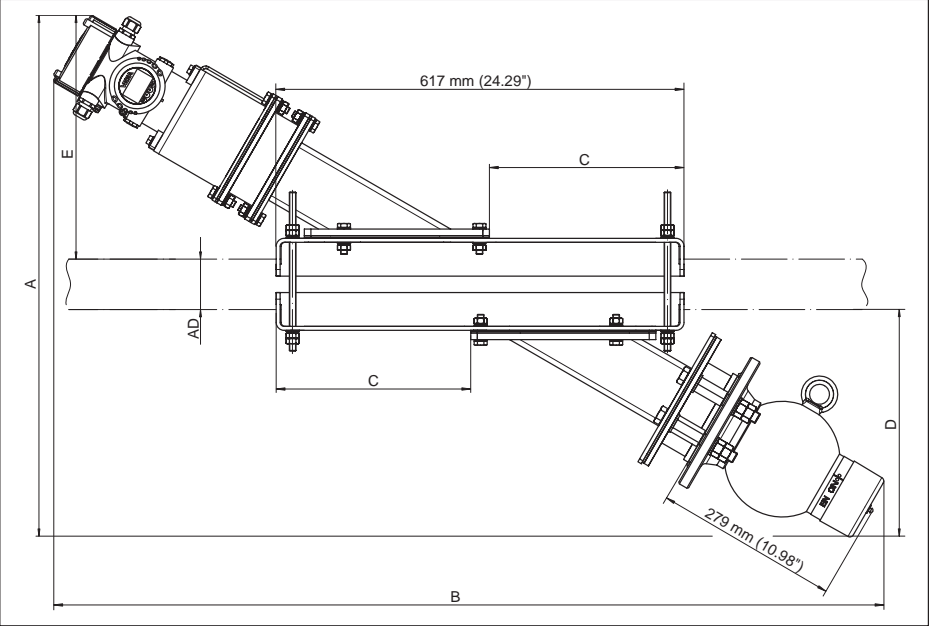


Fig. 10: Mounting bracket with collimators on the sensor and source holder side

- A Total width  
AD Tube diameter  
B Total length  
C Adjustment  
D Height - Radiator side  
E Height - Sensor side

Tube DN (in)	Tube diameter (AD)	Total width (A)	Total length (B)	Adjustment (C)	Height - Radiator side (D)	Height - Sensor side (E)
DN 50 (2 in)	ø 60.3 mm (2.37 in)	764 mm (30 in)	1217 mm (47.9 in)	275 mm (10.8 in)	340 mm (13.4 in)	364 mm (14.4 in)
DN 65 (2.5 in)	ø 73 mm (2.9 in)	787 mm (31 in)	1256 mm (49.5 in)	294.4 mm (11.6 in)	343 mm (13.5 in)	367 mm (14.5 in)
DN 80 (3 in)	ø 88.9 mm (3.5 in)	805 mm (31.7 in)	1287 mm (50.7 in)	310 mm (12.2 in)	352 mm (13.9 in)	376 mm (14.8 in)
DN 100 (4 in)	ø 114.3 mm (4.5 in)	841 mm (33.1 in)	1349 mm (53.2 in)	341.2 mm (13.5 in)	370 mm (10.8 in)	394 mm (15.5 in)



### 3.3 Industrial property rights

VEGA product lines are global protected by industrial property rights. Further information see [www.vega.com](http://www.vega.com).

VEGA Produktfamilien sind weltweit geschützt durch gewerbliche Schutzrechte.

Nähere Informationen unter [www.vega.com](http://www.vega.com).

Les lignes de produits VEGA sont globalement protégées par des droits de propriété intellectuelle. Pour plus d'informations, on pourra se référer au site [www.vega.com](http://www.vega.com).

VEGA lineas de productos están protegidas por los derechos en el campo de la propiedad industrial. Para mayor información revise la pagina web [www.vega.com](http://www.vega.com).


Линии продукции фирмы ВЕГА защищаются по всему миру правами на интеллектуальную собственность. Дальнейшую информацию смотрите на сайте [www.vega.com](http://www.vega.com).

VEGA系列产品在全球享有知识产权保护。

进一步信息请参见网站[www.vega.com](http://www.vega.com)。

### 3.4 Trademark

All the brands as well as trade and company names used are property of their lawful proprietor/originator.

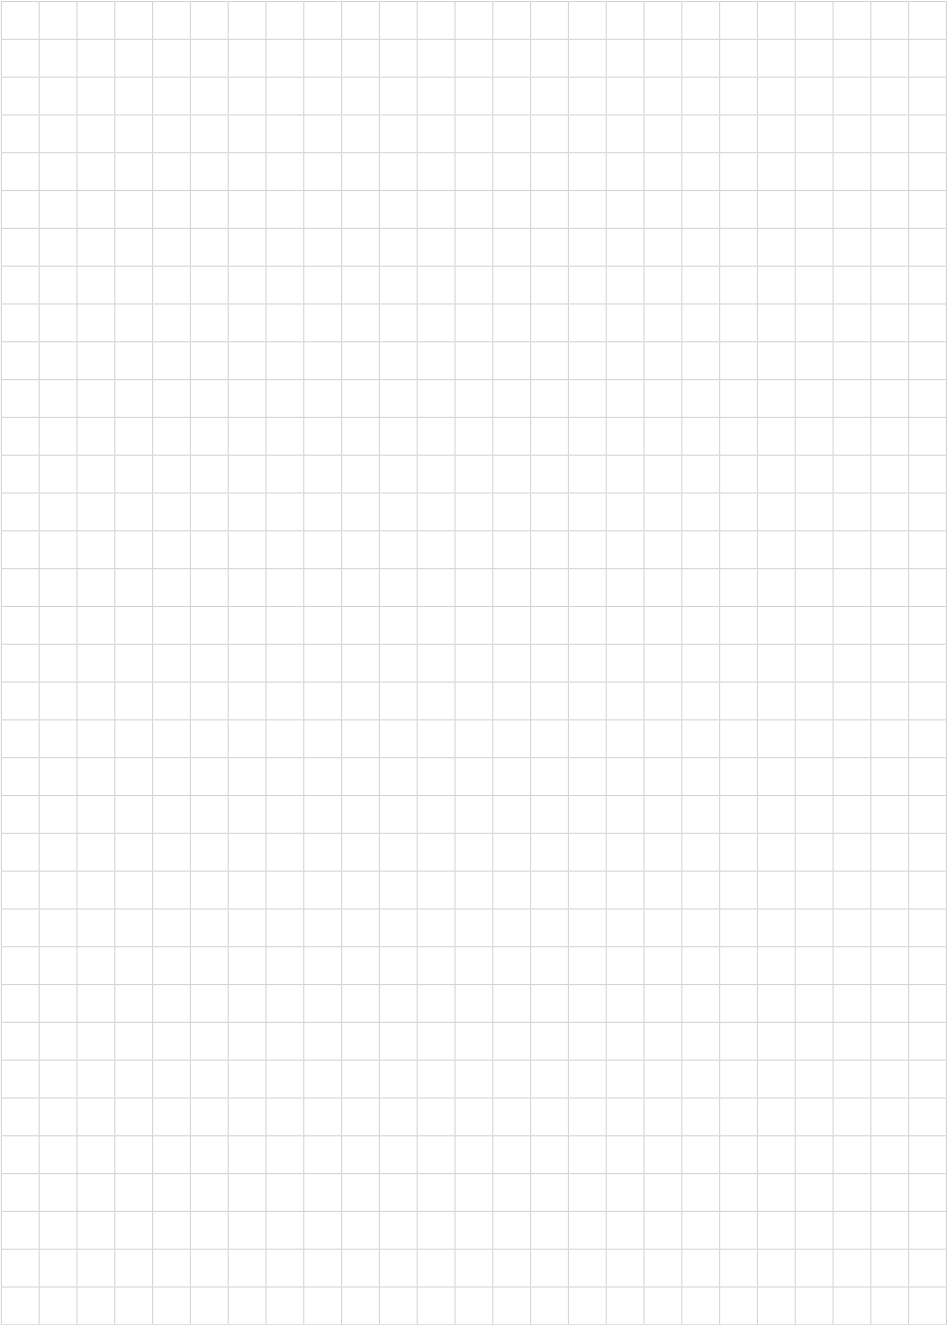

41863-EN-170724



Printing date:

# VEGA

All statements concerning scope of delivery, application, practical use and operating conditions of the sensors and processing systems correspond to the information available at the time of printing.

Subject to change without prior notice

© VEGA Grieshaber KG, Schiltach/Germany 2017



41863-EN-170724

VEGA Grieshaber KG  
Am Hohenstein 113  
77761 Schiltach  
Germany

Phone +49 7836 50-0  
Fax +49 7836 50-201  
E-mail: [info.de@vega.com](mailto:info.de@vega.com)  
[www.vega.com](http://www.vega.com)