

## Safety instructions

**FIBERTRAC 31**

**SOLITRAC 31**

**MINITRAC 31, 32**

**POINTRAC 31**

**WEIGHTRAC 31, 32**

Firedamp areas in mines (group I)

Flameproof enclosures

Intrinsic safety

IECEX BVS 10.0060

4 ... 20 mA/HART - four-wire



Document ID: 55271



**VEGA**

## Contents

1	Area of applicability.....	3
2	General information.....	3
3	Special instructions for installation.....	5
4	Installation, assignment EPL areas .....	7
5	Safe operating mode .....	7
6	Grounding.....	7
7	Material resistance .....	7
8	Mechanical data.....	7
9	Electrical data.....	7
10	Thermal data .....	9
11	Protection against static electricity .....	9
12	Impact and friction sparks .....	9
13	Mounting with external display unit VEGADIS 61/81.....	9
14	Ignition protection type flameproof enclosure Ex "d" .....	9
15	Instructions for group I applications .....	11
16	Ignition protection type intrinsic safety Ex "ia" .....	11
17	Use of an overvoltage arrester .....	12
18	Version with cooling option .....	12

Supplementary documentation:

- Operating Instructions FIBERTRAC 31, 32, SOLITRAC 31, MINITRAC 31, 32, POINTRAC 31, WEIGHTRAC 31, 32
- SIL Safety Manual FIBERTRAC 31, 32, SOLITRAC 31, MINITRAC 31, 32, POINTRAC 31
- Certificate of Conformity IECEx BVS 10.0060 (Document ID: 55223)

Editing status: 2017-01-17

## 1 Area of applicability

These safety instructions apply to the radiation-based sensors of the PROTRAC series:

FIBERTRAC FT31.TX\*B/L\*\*\*\*(\*)\*\*

SOLITRAC ST31.TX\*B/L\*\*\*\*(\*)\*\*

MINITRAC MT31/2.TX\*B/L\*\*\*\*

POINTRAC PT31.TX\*B/L\*\*\*\*(\*)\*\*

WEIGHTRAC WT31/2.TX\*B\*\*\*\*\*

according to Certificate of Conformity IECEx BVS 10.0060 (certificate number on the type label) and for all instruments with the number of the safety instruction (55271) on the type label.

## 2 General information

The sensors of the PROTRAC series are part of the radiation-based measuring principle.

In a radiation-based measurement, a weak radioactive source on the tank emits focused gamma rays. A special detector mounted on the opposite side of the tank receives the radiation which is converted into flashes of light. The number of these flashes is detected and evaluated.

The FIBERTRAC 31 and SOLITRAC 31 sensors of the PROTRAC series are suitable for non-contact level and interface measurement.

The MINITRAC 31, MINITRAC 32 sensors of the PROTRAC series are suitable for the non-contact, continuous density measurement and level detection of liquids and bulk solids in pipelines and vessels.

The POINTRAC 31 sensors of the PROTRAC series are suitable for non-contact level detection of liquids and bulk solids.

The WEIGHTRAC 31, WEIGHTRAC 32 sensors of the PROTRAC series are suitable for non-contact, continuous mass flow measurement of bulk solids on conveyor belts and screw conveyors.

The sensors FIBERTRAC FT31.TX\*B/L\*\*\*\*(\*)\*\*, SOLITRAC ST31.TX\*B/L\*\*\*\*(\*)\*\*, MINITRAC MT31/2.TX\*B/L\*\*\*\*, POINTRAC PT31.TX\*B/L\*\*\*\*(\*)\*\*, WEIGHTRAC WT31/2.TX\*B\*\*\*\*\* of the PROTRAC are suitable for use in subsurface mines, in firedamp-proof plants as well as their above-ground plants for which danger due to firedamp and/or combustible, dust-generating bulk solids exists.

The sensors of the PROTRAC series are suitable for applications requiring category M2 (EPL Mb) instruments.

If the PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* are installed and operated in hazardous areas, the general Ex installation regulations IEC 60079-14 as well as these safety instructions must be observed.

### Ignition protection label

IEC 60079-0, IEC 60079-1, IEC 60079-11

Ex db [ia Ma] I Mb

## Important specification in the type code

### PROTRAC-Serie (x)xxxxTRAC xT3\*.a\*cdef\*h(\*)

Position		Feature	Description
(x)xxxxTRAC	Device name	FIBER	FIBERTRAC FT31
		SOLI	SOLITRAC ST31
		MINI	MINITRAC MT31, MINITRAC MT32
		POIN	POINTRAC PT31
		WEIGH	WEIGHTRAC WT31, WEIGHTRAC WT32
xT3*	Instrument code	F	FIBERTRAC FT31
		S	SOLITRAC ST31
		M	MINITRAC MT31, MINITRAC MT32
		P	POINTRAC PT31
		W	WEIGHTRAC WT31, WEIGHTRAC WT32
a	Approval	TX	Ex db [ia Ma] I Mb
c	Electronics	B	Four-wire, 4 ... 20 mA/HART (Ex-ia output)
		L	Four-wire, 4 ... 20 mA/HART (Ex-ia output) with SIL qualification
d	Housing / Protection	D	Aluminium double chamber / IP 66/IP 67
		W	Stainless steel double chamber / IP 66/IP 67
		A	Aluminium double chamber with 316L Conduit cooling connection / IP 66/IP 67
		V	Stainless steel double chamber with 316L Conduit cooling connection / IP 66/IP 67
		S	Aluminium double chamber (special colour) / IP 66/IP 67
		R	Aluminium double chamber (special colour) with 316L Conduit cooling connection / IP 66/IP 67
e	Cable entry / Cable gland / Plug connection	M	M20 x 1.5 / without / without
		N	½ NPT / without / without
f	Display and adjustment module PLICSCOM	X	without
		F	without; lid with inspection window
		B	Laterally mounted
		L	laterally mounted; with Bluetooth, magnetic pen operation
		S	laterally mounted; with Bluetooth, battery, magnetic pen operation
h	Measuring length	(*)**	2 or 3-digit measuring length of the sensor connection with FIBERTRAC FT31, SOLITRAC ST31 and POINTRAC PT31 This feature is not available with MINITRAC MT31, MINITRAC MT32.
h(*)	Frame setup	***	Different features of the frame setup with frame construction, measuring width, clear height and source fastening with WEIGHTRAC WT31, WEIGHTRAC WT32

### 3 Special instructions for installation

- The following requirements must be fulfilled for mounting, electrical installation, setup and maintenance of the instrument:
  - the staff must qualified according the respective tasks
  - the staff must be trained in explosion protection
  - the staff must be familiar with the respectively valid regulations, e.g. planning and installation acc. to IEC 60079-14
- The instrument has to be mounted according to the manufacturer specifications and the valid regulations and standards.
- Modifications on the instruments can influence the explosion protection and hence the safety. Modifications must only be carried by staff authorized by VEGA.
- Keep in mind for instrument mounting
  - mechanical damage on the instrument must be avoided
  - mechanical friction must be avoided
- The instruments must be mounted/installed in such a way that the following can be ruled out:
  - electrostatic charges during operation, maintenance and cleaning.
  - process-related electrostatic charges, e.g. by measuring media flowing past
- Take note of the type and size of the thread
  - Label in the area of the thread with respective name.
  - Only use the cable entries and closing screws if they are required and suitable according to ignition protection type and the application. Take note of the selection criteria acc. to IEC 60079-14.
  - Threads must have no damages.
  - The threads for mounting certified cable entries are of type M20 x 1.5 with sensors of the PROTRAC series (x)xxxTRACxT31/2.TX\*\*\*M\*\*.
  - The threads for mounting certified cable entries are of type ½-14 NPT with sensors of the PROTRAC series (x)xxxTRAC xT31/2.TX\*\*\*N\*\*.



- 1 Label: Type and size of the thread ½-14 NPT or M20 x 1.5
- 2 Locking screw of the lid
- 3 Screw plug
- 4 "Ex-d" connection compartment
- 5 Red threaded or dust protection cap
- 6 Label: Type and size of the thread ½-14 NPT or M20 x 1.5
- 7 "Ex-i" connection compartment

- Cable entries and closing screws should be mounted correctly and according to the safety instructions of the manufacturer to ensure the specified ignition protection type. Supplied cable entries or closing screws meet these requirements.
- The red thread or/dust covers screwed in when the instruments are shipped (depending on the version) must be removed before setup and closed by cable entries or closing screws suitable for the ignition protection type.
- When using certified or suitable cable glands, closing screws or plug connections, it is obligatory to observe the appropriate certificates/documents.
- Before operation tighten the housing lid/s up to the stop to ensure the IP protection rating specified on the type label. Lock the lid by unscrewing the locking screw up to the stop. On the double chamber housing, you have to lock both lids.

The housing lids are marked with a warning label.

**WARNING- DO NOT OPEN WHEN AN  
EXPLOSIVE ATMOSPHERE IS PRESENT**

- Unused openings must be provided with plugs suitable for the ignition protection type. Supplied plugs meet these requirements.

## 4 Installation, assignment EPL areas

### EPL Mb instrument

The sensors of PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* are installed in hazardous areas requiring a EPL Mb instrument.

## 5 Safe operating mode

Do not operate the instrument outside the electrical, thermal and mechanical specifications of the manufacturer.

The supplied cable entries and closing screws are suitable for the specified housing temperature range. If other cable entries and closing screws are used, they will probably specify the permissible ambient temperature on the housing.

To exclude the danger of mechanical damage, the FIBERTRAC FT31/2.TX\*B/L\*\*\*\*(\*)\*\* must be installed in such a way that the flexible detector is protected from environmental influences.

## 6 Grounding

For safety reasons, the the sensors of PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* must be grounded. The external or internal ground connection terminal on the housing is used for this purpose.

## 7 Material resistance

The sensors of PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* must only be used in media against which the materials of the wetted parts are sufficiently resistant.

## 8 Mechanical data

<b>PROTRAC-Serie (x)xxxTRAC xT31/2.TX*B/L****</b>	
Housing protection rating	IP 66

## 9 Electrical data

### Non-intrinsically safe circuits (in the "Ex-d" connection compartment)

#### PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\*

Voltage supply: (terminals 1[L1], 2[N])	U = 20 ... 253 V AC
	U = 20 ... 72 V DC
	U <sub>m</sub> = 253 V
Relay circuit: (terminals 4[NC], 5[Common], 6[NO])	Maximum values:
	253 V AC, 3 A, 500 VA
	253 V AC, 1 A, 41 W
Current input: (terminals 12[In+], 13[In-])	I = 4 ... 20 mA
Digital input: (terminals 14[+100 mA], 15[+10 mA], 16[Common])	

Digital output: (terminals 17[Out+], 18[Out-])

- Max. load current: floating transistor output 400 mA, 55 V DC

Multigauge Communication: (terminals 19[Serial out-], 20[Serial out+], 21[Serial in-], 22[Serial in+]) Communication circuit, only for communication with additional PROTRAC instruments

**Intrinsically safe circuits (in the "Ex-i" connection compartment)**

**PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\***

Display and adjustment circuit: (terminals 5, 6, 7, 8 in the lateral chamber) In ignition protection type intrinsic safety Ex ia I, ib I  
For connection to the intrinsically safe circuit of the corresponding external display unit VEGADIS 61/81.

Maximum values:

- $U_o = 6 \text{ V}$
- $I_o = 209.7 \text{ mA}$
- $P_o = 314.6 \text{ mW}$

Characteristics: linear

The effective internal capacitance  $C_i$  is negligibly small.

The effective internal inductance  $L_i$  is negligibly small.

	Ex ia I
Permissible inductance $L_o$	1 mH
Permissible capacitance $C_o$	1.4 $\mu\text{F}$

Circuit of the display and adjustment module: (spring contacts in the lateral chamber)

In ignition protection type intrinsic safety Ex ia I, ib I  
Only for connection to the display and adjustment module PLICSCOM.

**PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\***

Intrinsically safe current output: (terminals 1[+], 2[-] in the lateral chamber)

- FIBERTRAC, SOLITRAC, MINITRAC, WEIGHTRAC:
  - $I = 4 \dots 20 \text{ mA}$  with superimposed HART signal
- POINTRAC 31:
  - $I = 8/16 \text{ mA}$  with superimposed HART signal

Maximum values:

- $U_o = 22.16 \text{ V}$
- $I_o = 111.9 \text{ mA}$
- $P_o = 620.03 \text{ mW}$

Characteristics: linear

The effective internal capacitance  $C_i$  is negligibly small.

The effective internal inductance  $L_i$  is negligibly small.

	Ex ia I
Permissible inductance $L_o$	5 mH
Permissible capacitance $C_o$	1.3 $\mu\text{F}$



## 10 Thermal data

The max. permissible ambient temperatures depending on the temperature classes are specified in the following tables.

The max. surface temperature is limited by a temperature fuse to +98 °C.

The permissible ambient temperature is -40 ... +60 °C.

## 11 Protection against static electricity

The PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* in the version with chargeable plastic parts, as e.g. metal housing with inspection window or plastic detectors, is provided with a caution label referring to the safety measures that must be taken with regard to electrostatic charges during operation.

WARNING- POTENTIAL ELECTROSTATIC  
CHARGING HAZARD - SEE INSTRUCTIONS

Caution: Plastic parts! Danger of electrostatic charging!

- Avoid friction
- No dry cleaning
- Construction/Installation: The PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* must be constructed/installed in such a way that
  - electrostatic charges are ruled out during operation, maintenance and cleaning.
  - process-related electrostatic charges, e.g. by measuring media flowing past, are ruled out

## 12 Impact and friction sparks

When used as category EPL Mb instruments, the PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* in light metal versions (e.g. aluminium/titanium/zircon) must be mounted in such a way that sparks from impact and friction between light metals and steel (except stainless steel, if the presence of rust particles can be excluded) cannot occur.

## 13 Mounting with external display unit VEGADIS 61/81

The intrinsically safe signal circuit between PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* and the external indicating unit VEGADIS 61 or VEGADIS 81 should be set up without grounding. The required insulation voltage is > 500 V AC. When using VEGA connection cable, this requirement is fulfilled. If grounding of the cable screen is required, it must be carried out according to IEC 60079-14 (edition 2013).

### Overvoltage arrester, for the display circuit VEGADIS 61/81 (IECEx PTB 06.0048).

As far as acc. to IEC 60079-14, paragraph 16.3 (edition 2013) or other valid standards or regulations, an overvoltage protection is necessary, then a suitable overvoltage arrester must be connected to the display circuit of the instrument.

## 14 Ignition protection type flameproof enclosure Ex "d"

The terminals for connecting the operating voltage or signal circuits are integrated in the terminal compartment with ignition protection type flameproof enclosure "d".

The thread gap between housing and cover is a flameproof gap.

The "Ex-d" connection compartment is provided with a M20 x 1.5 or ½-14 NPT thread for connection to a certified "Conduit" system or for mounting a "Ex-d" cable entry certified according to

IEC 60079-1 (edition 2014). Cable entries of simple construction may not be used. Please take note of section 13.1 and 13.2 of IEC 60079-1. When connecting to a "Conduit" system, the associated sealing facility must be located directly on the "Ex-d" connection compartment.

When the sensors of PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* are delivered, depending on the version, the red threaded or dust protection caps must be removed before installing the device and the openings must be sealed according to the requirements of the ignition protection type and the IP protection type specified on the type label.

When using certified or suitable cable glands, closing screws or plug connections, it is obligatory to observe the appropriate certificates/documents.

The "Ex-d" cable entry and the closing screws must be tightly screwed into the housing.

The cable entry sent with the delivery is suitable for the housing temperature range specified in the PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* certificate. If a different cable entry is used, the separately certified cable entry/gland or the temperature classes on the electronics determines the max. permissible ambient temperature on the housing.

Before opening the lid of the "Ex-d" terminal compartment or in case it is already open (e. g. during connection or service work), make sure that either the supply cable is completely voltage free or no explosive atmosphere is present.

When wiring the connection line to the "Ex-d" connection compartment, it must be sufficiently secured against damage and in conformity with IEC 60079-14.

The connection cables, the cable entries and the closing screws or the pipeline sealing facilities must be suitable for the lowest ambient temperature.

The cover of the "Ex-d" connection compartment must be screwed in completely before commissioning and secured by screwing out the lid locking screw all the way to the stop.

Unused openings must be sealed according to IEC 60079-1 paragraph 13.8 (edition 2014).

The flame path joints must not be repaired.

## Double chamber housing with "Ex-d" connection compartment



- 1 "Ex-i" connection compartment
- 2 Locking screws of the cover
- 3 "Ex-d" connection compartment

## 15 Instructions for group I applications

In hazardous areas, the instrument should only be operated under atmospheric conditions:

- Temperature: -20 ... +60 °C.
- Pressure: 80 ... 110 kPa (0.8 ... 1.1 bar)
- Air with normal oxygen content, normally 21 %

If there are no explosive mixtures, then the instruments can be also operated according to the manufacturer specification outside atmospheric conditions.

## 16 Ignition protection type intrinsic safety Ex "ia"

Optionally the VEGA display and adjustment module PLICSCOM can be integrated.

The VEGA display and adjustment unit VEGADIS 61 or VEGADIS 81 (IECEx PTB 06.0048) can be connected if necessary. The respective operating or safety instructions must be observed.

The PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* has an intrinsically safe current output.

Only connect the instrument to certified associated instruments with protective level Ex ia (EPL Ma) or Ex ib (EPL Mb). When connecting to an associated instrument with protective level Ex ib (EPL Mb), then the flame proofing changes to Ex ib I.

---

The regulations for connection of intrinsically safe circuits (e.g. IEC 60079-14, proof of intrinsic safety) must be observed

The intrinsically safe output circuits are ground-free. The voltage resistance is min. 500 Veff against ground.

## **17 Use of an overvoltage arrester**

If necessary, a suitable overvoltage arrester can be connected in front of the sensors of PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\*.


As far as acc. to IEC 60079-14, paragraph 16.3 (edition 2014) or other valid standards or regulations, an overvoltage protection is necessary, then a suitable overvoltage arrester must be connected to the instrument.


Observe the respective operating or safety instructions.


## **18 Version with cooling option**

With sensors of PROTRAC-Serie (x)xxxTRAC xT31/2.TX\*B/L\*\*\*\* with optional accessory of the cooling option, the operator must take care that the approved ambient temperature range on the Ex-certified housing, electronics is not exceeded.

Please make sure that before cooling, there is no explosive atmosphere present in the cooling option.

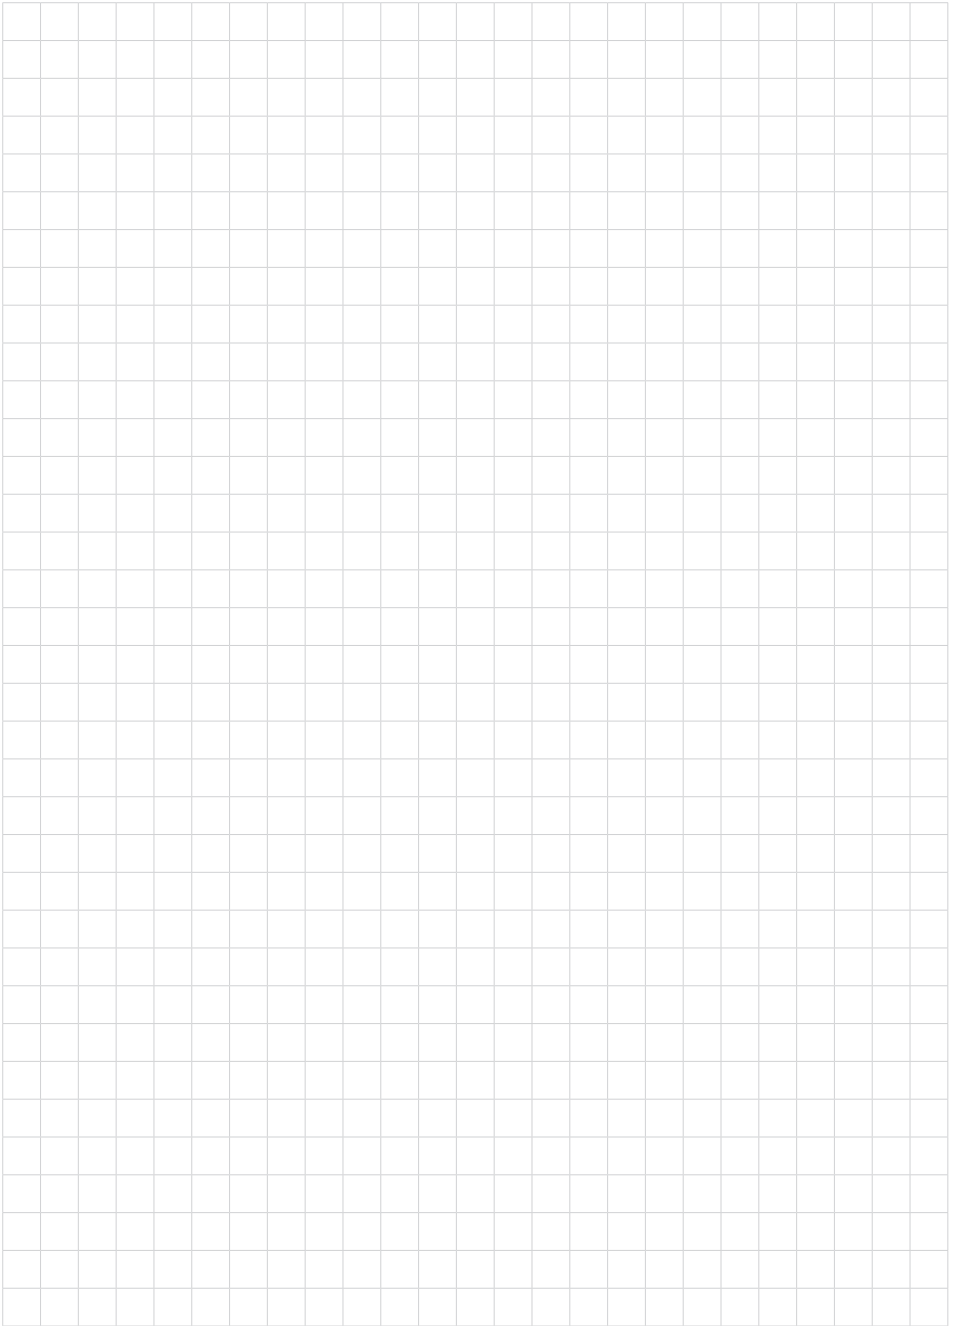

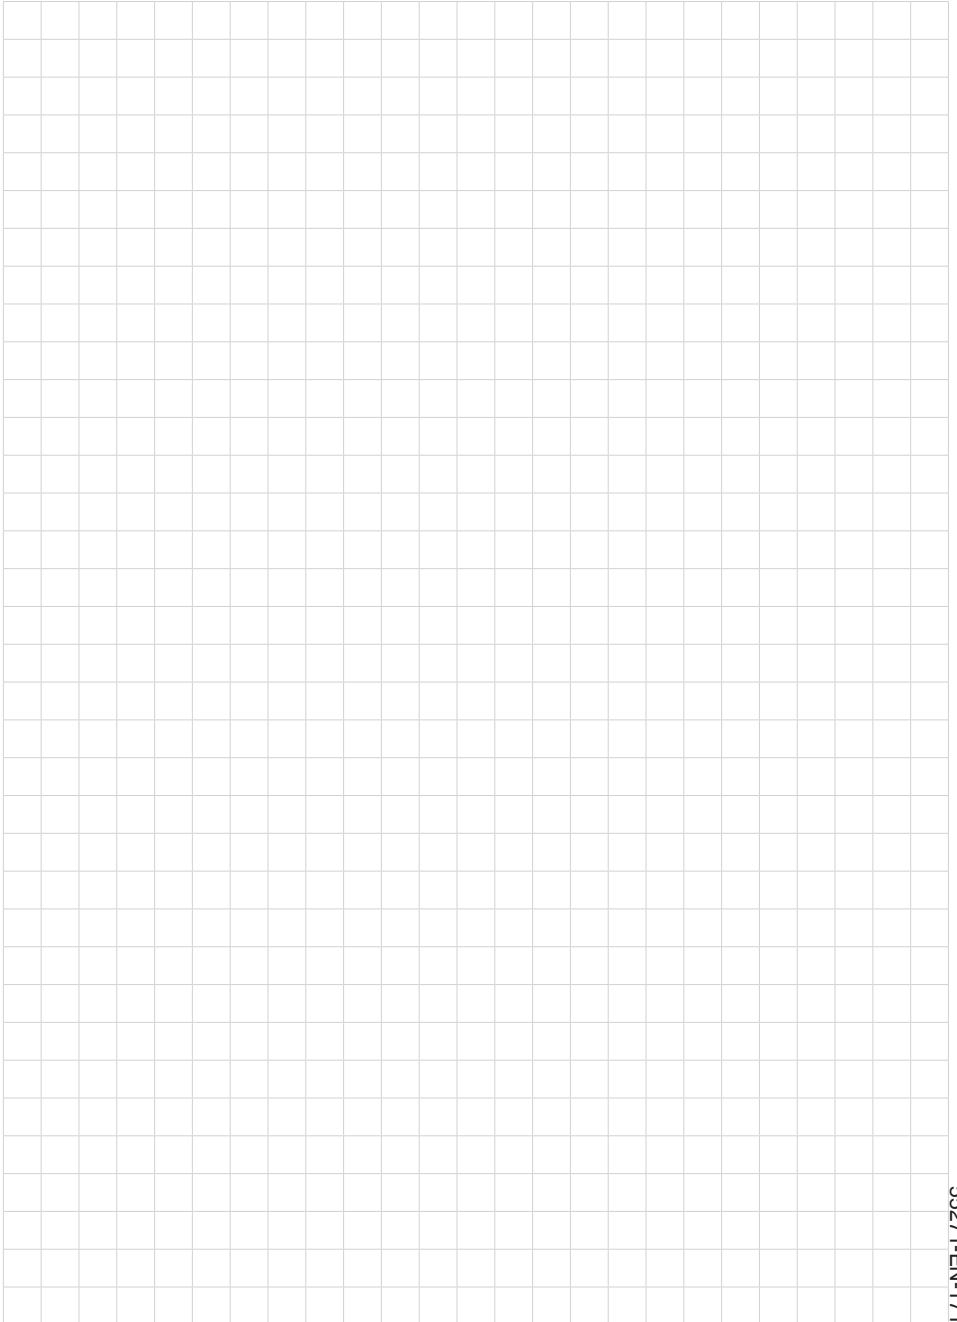

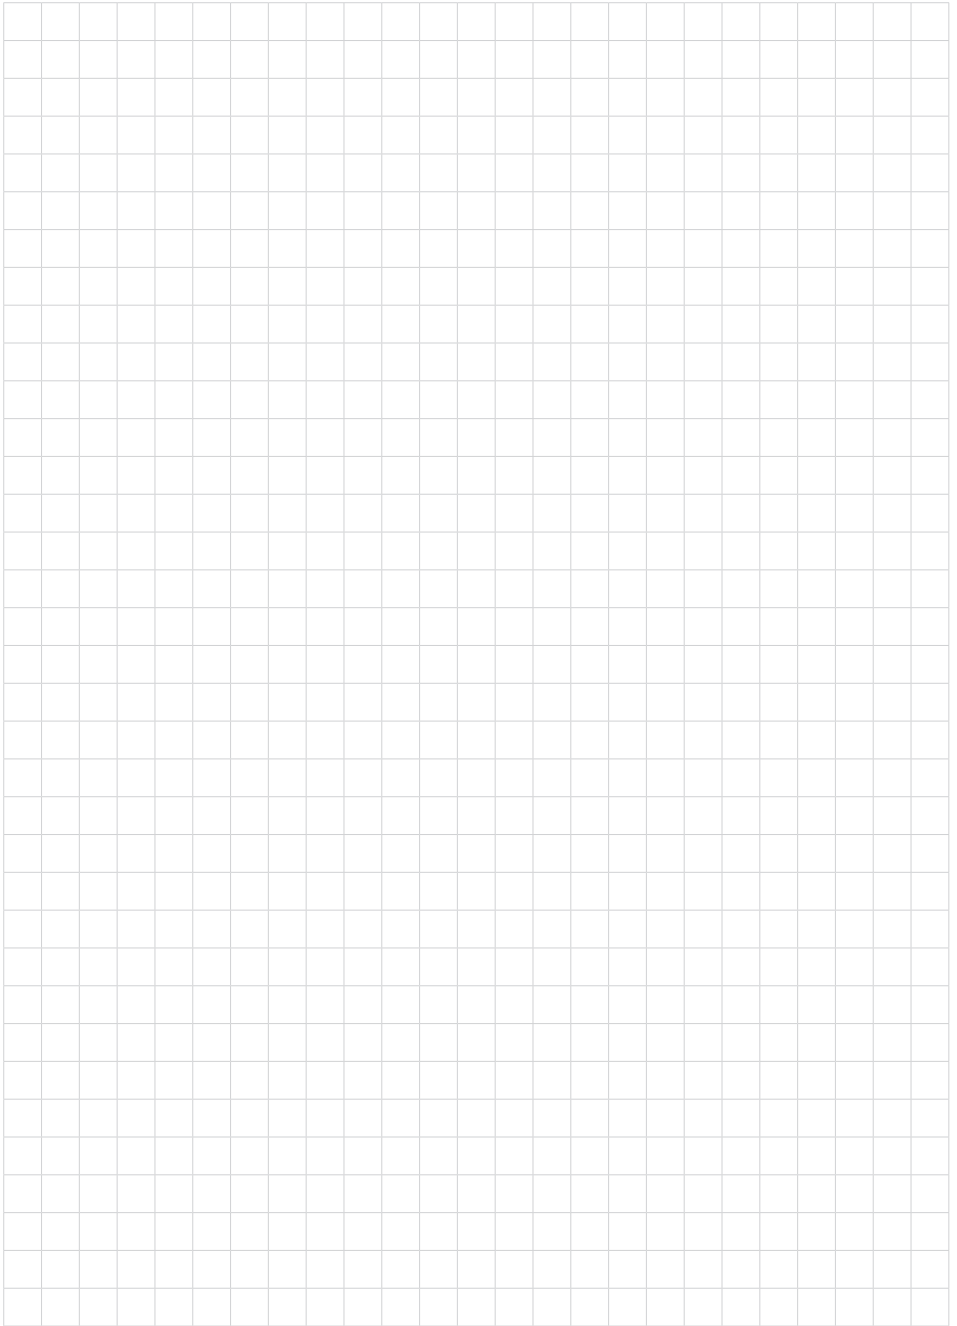

Printing date:

**VEGA**

All statements concerning scope of delivery, application, practical use and operating conditions of the sensors and processing systems correspond to the information available at the time of printing.

Subject to change without prior notice

© VEGA Grieshaber KG, Schiltach/Germany 2017

55271-EN-171221

VEGA Grieshaber KG  
Am Hohenstein 113  
77761 Schiltach  
Germany

Phone +49 7836 50-0  
Fax +49 7836 50-201  
E-mail: [info.de@vega.com](mailto:info.de@vega.com)  
[www.vega.com](http://www.vega.com)