



### Reliable

Dependable protection against overflowing

### Cost effective

Optimal utilization of the container volume

### User friendly


Simple setup and commissioning

## Liquid waste buffer tank

### Level measurement and point level detection in buffer tanks for liquid waste

In preparation for proper disposal, liquid wastes that arise in the production of pharmaceuticals are temporarily stored in buffer tanks. These potentially hazardous mixtures consist of diverse media with very different properties including dielectric conductivity (dielectric constant) and density. For optimal storage, reliable and accurate level measurement is required. Point level detection ensures overflow and dry run protection.

[More details](#)

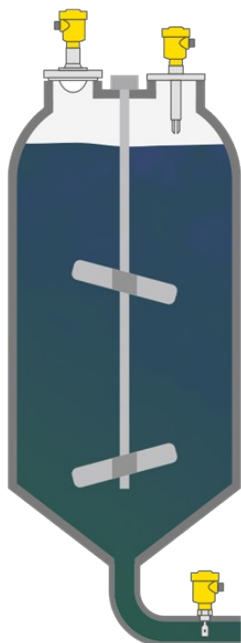

#### VEGAPULS 6X

Level measurement with radar in liquid waste buffer tanks

- Measurement down to the tank bottom, even in media with low dielectric constant
- Long service life thanks to highly resistant materials
- Due to false signal suppression, measuring result is not affected by agitators

[Show Product](#)



#### VEGASWING 61

Vibrating level switch for dry run protection in a buffer tank for liquid waste

- Reliable detection of dry run ensures continuous process
- Dependable function through media-independent switching point
- Simple setup without adjustment

[Show Product](#)



#### VEGASWING 63

Vibrating level switch for point level detection in liquid waste buffer tanks

- Reliable product-independent switch point
- Simple setup without adjustment
- Test key on the barrier device allows simple function check

[Show Product](#)

PRO

## VEGAPULS 6X

[Show Product](#)



**Measuring range - Distance**  
120 m

**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 160 bar

**Accuracy**  
± 1 mm

**Frequency**  
6 GHz  
26 GHz  
80 GHz

**Beam angle**  
≥ 3°

**Materials, wetted parts**  
PTFE  
PVDF  
316L  
PP  
PEEK

**Threaded connection**  
≥ G¾, ≥ ¾ NPT

**Flange connection**  
≥ DN20, ≥ ¾"

**Hygienic fittings**  
Clamp ≥ 1½" - DIN32676, ISO2852  
Slotted nut ≥ 2", DN50 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting with tension flange DN32  
hygienic fitting F40 with compression nut  
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A  
Hygienic flange connection ≥ DN50 DIN11864-2  
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A  
DRD connection ø 65 mm  
SMS 1145 DN51

PRO

## VEGASWING 61

[Show Product](#)



**Measuring range - Distance**  
-

**Process temperature**  
-50 ... 250 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
Standard  
Hygienic applications  
with gas-tight leadthrough  
with temperature adapter

**Materials, wetted parts**  
PFA  
316L  
Alloy C22 (2.4602)  
Alloy 400 (2.4360)  
ECTFE  
Enamel

**Threaded connection**  
≥ G¾, ≥ ¾ NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Hygienic fittings**  
Clamp ≥ 1" - DIN32676, ISO2852  
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting F40 with compression nut  
SMS 1145 DN51  
SMS DN38  
Hygienic fittings ≥ DN25 - DIN11864-1-A  
Hygienic flange connection DIN11864-2-A;  
DN60(ISO)ø60,3  
SMS socket piece DN38 PN6

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

PRO

## VEGASWING 63

[Show Product](#)



**Process temperature**  
-50 ... 250 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
Standard  
Hygienic applications  
with gas-tight leadthrough  
with tube extension  
with temperature adapter

**Materials, wetted parts**  
PFA  
316L  
Alloy C22 (2.4602)  
Alloy 400 (2.4360)  
ECTFE  
Enamel

**Threaded connection**  
≥ G¾, ≥ ¾ NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Hygienic fittings**  
Clamp ≥ 1" - DIN32676, ISO2852  
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting F40 with compression nut  
SMS 1145 DN51  
SMS DN38  
Hygienic fittings ≥ DN25 - DIN11864-1-A  
Hygienic flange connection DIN11864-2-A;  
DN60(ISO)ø60,3  
SMS socket piece DN38 PN6

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP67  
IP66/IP68 (1 bar)  
IP65