



Reliable

Reliable protection against overflowing

Cost effective

Independent of product and process characteristics

User friendly


Simple to set up with maintenance-free operation

Storage and buffer tanks

Level measurement and point level detection in small storage and buffer tanks

Storage and buffer tanks enable a reliable material supply for various ongoing processes. The plant operators need to have exact level data from these tanks at all times to ensure timely replenishment and facilitate continuous production. In addition, the measured values form the basis of the statistical consumption analysis for validation and quality monitoring.

[More details](#)

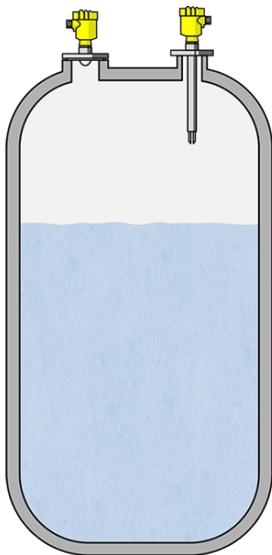

VEGAPULS 6X

Continuous level measurement with radar

- High chemical resistance through PTFE antenna cover
- Reliable measurement despite changing media
- Maintenance-free thanks to non-contact measurement

[Show Product](#)



VEGASWING 63

Vibrating level switch for point level detection

- Universally applicable as overflow and dry run protection system for virtually all liquid applications
- Media-independent switching point, reliable level information
- Highly resistant materials and coatings allow use in different media
- Test button for easy testing of instrument functionality during operation

[Show Product](#)

PRO

VEGAPULS 6X
[Show Product](#)

Measuring range - Distance
 120 m

Process temperature
 -196 ... 450 °C

Process pressure
 -1 ... 160 bar

Accuracy
 ± 1 mm

Frequency
 6 GHz
 26 GHz
 80 GHz

Beam angle
 ≥ 3°

Materials, wetted parts
 PTFE
 PVDF
 316L
 PP
 PEEK

Threaded connection
 ≥ G¾, ≥ ¾ NPT

Flange connection
 ≥ DN20, ≥ ¾"

Hygienic fittings
 Clamp ≥ 1½" - DIN32676, ISO2852
 Slotted nut ≥ 2", DN50 - DIN 11851
 Varivent ≥ DN25
 hygienic fitting with tension flange DN32
 hygienic fitting F40 with compression nut
 Hygienic screw connections ≥ DN50 tube ø53 -
 DIN11864-1-A
 Hygienic flange connection ≥ DN50 DIN11864-2
 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-
 3-A
 DRD connection ø 65 mm
 SMS 1145 DN51

PRO

VEGASWING 63
[Show Product](#)

Process temperature
 -50 ... 250 °C

Process pressure
 -1 ... 64 bar

Version
 Standard
 Hygienic applications
 with gas-tight leadthrough
 with tube extension
 with temperature adapter

Materials, wetted parts
 PFA
 316L
 Alloy C22 (2.4602)
 Alloy 400 (2.4360)
 ECTFE
 Enamel

Threaded connection
 ≥ G¾, ≥ ¾ NPT

Flange connection
 ≥ DN25, ≥ 1"

Hygienic fittings
 Clamp ≥ 1" - DIN32676, ISO2852
 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
 Varivent ≥ DN25
 hygienic fitting F40 with compression nut
 SMS 1145 DN51
 SMS DN38
 Hygienic fittings ≥ DN25 - DIN11864-1-A
 Hygienic flange connection DIN11864-2-A;
 DN60(ISO)ø60,3
 SMS socket piece DN38 PN6

Seal material
 no media contact

Housing material
 Plastic
 Aluminium
 Stainless steel (precision casting)
 Stainless steel (electropolished)

Protection rating
 IP66/IP67
 IP66/IP68 (1 bar)
 IP65

VEGA