



Reliable

Reliable dry run protection of these expensive, easily damaged pumps

Cost effective

High availability of the pumps

User friendly


Product independent function, thus simple setup and commissioning

Pumps for wet strength agent

Pressure measurement and point level detection for eccentric pumps

Wet strength agents are polymeric additives that enhance water resistance properties, especially in sanitary and specialty papers. They are applied in the paper machine via a size press or spraying device. Because of their high pH value, these substances are stored in double-walled GRP (glass reinforced plastic) tanks. The high viscosity of the medium requires the use of a pneumatic conveyor system and special eccentric pumps for filling and emptying. With these pump types, dry run protection and pressure monitoring is a necessity.

[More details](#)

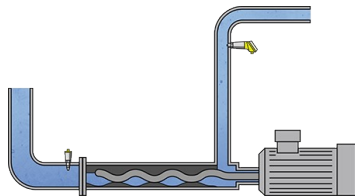

VEGABAR 38

Pressure monitoring of pipelines leading to the paper machine

- Small, front-flush process fitting
- High measurement certainty through vacuum-resistant design

[Show Product](#)



VEGAPOINT 21

Capacitive level switch for dry run protection for eccentric pumps

- Accurate and reliable function through product-independent switching point
- Setup without adjustment

[Show Product](#)

BASIC

VEGABAR 38
[Show Product](#)
**Measuring range - Pressure**

-1 ... 60 bar

Process temperature

-40 ... 130 °C

Accuracy

0.3 %

Materials, wetted parts

PVDF
 316L
 Duplex (1.4462)
 Ceramic

Threaded connection

≥ G½, ≥ ½ NPT

Hygienic fittings

Clamp ≥ 2", DN50 - DIN32676, ISO2852
 Clamp ≥ 1" - DIN32676, ISO2852
 Clamp ≥ 1½" - DIN32676, ISO2852
 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
 Slotted nut ≥ DN25 - DIN 11851
 SMS DN38
 Hygienic fittings ≥ DN25 - DIN11864-1-A
 Hygienic fittings ≥ DN40 - DIN11864-1-A
 Varivent N50-40
 SMS DN25
 Ingold connection PN10
 Varivent F25

Seal material

EPDM
 FKM
 FFKM

Housing material

Plastic

Protection rating

IP66/IP67
 IP65

Output

4 ... 20 mA
 Three-wire (PNP/NPN, 4 ... 20 mA)
 IO-Link

BASIC

VEGAPOINT 21
[Show Product](#)
**Measuring range - Distance**

-

Process temperature

-40 ... 115 °C

Process pressure

-1 ... 25 bar

Materials, wetted parts

316L
 PEEK

Threaded connection

≥ G½, ≥ ½ NPT

Hygienic fittings

Clamp ≥ 2", DN50 - DIN32676, ISO2852
 Clamp ≥ 1" - DIN32676, ISO2852
 Clamp ≥ 1½" - DIN32676, ISO2852
 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
 Slotted nut ≥ DN25 - DIN 11851
 Slotted nut ≥ DN32 - DIN 11851

Seal material

EPDM
 FKM

Protection rating

IP66/IP67
 IP69

Output

Transistor (NPN/PNP)
 IO-Link

Ambient temperature

-40 ... 70 °C