



Reliable

High reliability and functional safety

Cost effective

Maintenance-free operation with simple calibration and proof testing

User friendly


Fast and easy installation and setup

Anhydrous ammonia storage tank

Level measurement and point level detection in the anhydrous ammonia storage tank

During the sulfur removal process, nitrogen is converted into ammonia through a water wash process to be sold for fertilizer production. Stringent environmental restrictions and the high hazard potential make secure control of the levels in ammonia handling processes absolutely necessary.

[More details](#)

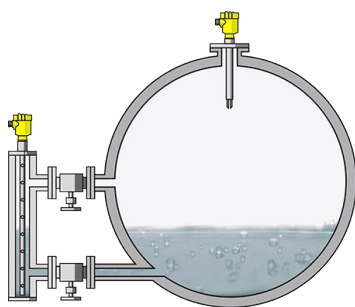

VEGASWING 63

Vibrating level switch for overfill protection

- Setup without filling reduces installation efforts
- Metal sealing protects against diffusion
- Easy function test by simple pushing a button

[Show Product](#)



VEGAFLEX 81

Level measurement with guided wave radar in the storage tank

- Front flush borosilicate glass seal provides uncompromising protection against diffusion
- Permeation resistance translates to freedom from maintenance and considerable savings
- Precise measurement results unaffected by boiling liquid surface or vapours

[Show Product](#)

PRO

VEGASWING 63

[Show Product](#)



Process temperature
-50 ... 250 °C

Process pressure
-1 ... 64 bar

Version
Standard
Hygienic applications
with gas-tight leadthrough
with tube extension
with temperature adapter

Materials, wetted parts
PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
ECTFE
Enamel

Threaded connection
≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT

Flange connection
≥ DN25, ≥ 1"

Hygienic fittings
Clamp ≥ 1" - DIN32676, ISO2852
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
Varivent ≥ DN25
hygienic fitting F40 with compression nut
SMS 1145 DN51
SMS DN38
Hygienic fittings ≥ DN25 - DIN11864-1-A
Hygienic flange connection DIN11864-2-A;
DN60(ISO)ø60,3
SMS socket piece DN38 PN6

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP67
IP66/IP68 (1 bar)
IP65

PRO

VEGAFLEX 81

[Show Product](#)



Measuring range - Distance
75 m

Process temperature
-60 ... 200 °C

Process pressure
-1 ... 40 bar

Accuracy
± 2 mm

Version
Basic version for exchangeable cable ø 2; ø 4 mm
Basic version for exchangeable rod ø 8 mm
Basic version for exchangeable rod ø 12 mm
Coax version ø 21.3 mm for ammonia application
Coax version ø 21.3 mm with single hole
Coax version ø 21.3 mm with multiple hole
Coax version ø 42.2 mm with multiple hole
Exchangeable rod ø 8 mm
Exchangeable rod ø 12 mm
Exchangeable cable ø 2 mm with gravity weight
Exchangeable cable ø 4 mm with gravity weight
Exchangeable cable ø 2 mm with centering weight
Exchangeable cable ø 4 mm with centering weight
Exchangeable cable ø 4 mm without weight
exchangeable, PFA-coated cable ø4 mm with non-coated
centering weight

Materials, wetted parts
PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
Alloy C276 (2.4819)
Duplex (1.4462)
304L

Threaded connection
≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT

Flange connection
≥ DN25, ≥ 1"

Seal material
EPDM
FKM
FFKM
Silicone FEP coated
Borosilicate glass

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)