



Reliable

Reliable measurement despite strong dust generation

Cost effective

Exact position monitoring without mechanical wear

User friendly


Maintenance and wear-free

Stacker

Detecting the position of the stacker in the blending bed

To maintain a high quality and uniform material consistency in the finished cement, the raw materials are homogenized in a blending bed. To achieve this the rock is distributed evenly over the blending bed with a stacker. Material is reclaimed in reverse order with the help of a scraper. In order to optimally control the conveyor systems, their positions must be determined as precisely as possible.

[More details](#)

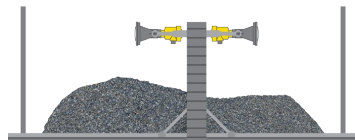

VEGAPULS 6X

Profile and distance measurement with radar on the stacker

- Reliable measurement, unaffected by dust and noise
- Maintenance-free operation through non-contact measuring method
- Simple mounting and setup

[Show Product](#)

VEGAPULS 6X
[Show Product](#)

Measuring range - Distance

120 m

Process temperature

-196 ... 450 °C

Process pressure

-1 ... 160 bar

Accuracy

± 1 mm

Frequency

6 GHz

26 GHz

80 GHz

Beam angle

≥ 3°

Materials, wetted parts

PTFE

PVDF

316L

PP

PEEK

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN20, ≥ ¾"

Hygienic fittings

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -

DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-

3-A

DRD connection ø 65 mm

SMS 1145 DN51