



Reliable

Reliable measurements ensure consistent operation of the paper machine

Cost effective

Differential pressure transmitters with pitot tube for low-cost oil flow measurement

User friendly


Convenient reading of the level directly at the measuring point

Hydraulic oil station

Level and flow measurement in the hydraulic oil station

In the press section of a paper machine, very high pressures are needed for dewatering the stock. Hydraulic oil stations provide the supply to the various parts of the machine as well as filtering and cooling the recirculating lubrication system. Integrated pumps provide oil to the required locations and to enable fully automatic operation of the station, the flow rate and the level in the supply tanks must be measured.

[More details](#)

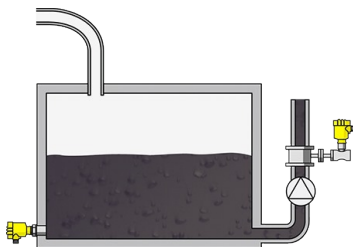

VEGADIF 85

Flow measurement in the hydraulic oil line via differential pressure

- Reliable flow values ensure high operational reliability of the paper machine
- Cost-effective flow measurement with differential pressure and pitot tube
- Direct mounting of the differential pressure transmitter at the measuring point

[Show Product](#)



VEGABAR 38

Hydrostatic level measurement in the oil supply tank

- Abrasion and overload resistant ceramic measuring cell guarantees high reliability
- Additional recording and display of the oil temperature

[Show Product](#)

PRO

BASIC

VEGADIF 85
[Show Product](#)


Measuring range - Pressure
-16 ... 16 bar

Process temperature
-40 ... 105 °C

Process pressure
-1 ... 400 bar

Accuracy
0.065 %

Materials, wetted parts
316L
Tantalum
Alloy C276 (2.4819)
Monel

Threaded connection
¼ - 18 NPT

Flange connection
≥ DN32, ≥ 1½"

Seal material
EPDM
FKM
Copper

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP68 (0,2 bar)
IP66/IP67
IP66/IP68 (1 bar)

VEGABAR 38
[Show Product](#)


Measuring range - Pressure
-1 ... 60 bar

Process temperature
-40 ... 130 °C

Accuracy
0.3 %

Materials, wetted parts
PVDF
316L
Duplex (1.4462)
Ceramic

Threaded connection
≥ G½, ≥ ½ NPT

Hygienic fittings
Clamp ≥ 2" - DN50 - DIN32676, ISO2852
Clamp ≥ 1" - DIN32676, ISO2852
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
Slotted nut ≥ DN25 - DIN 11851
SMS DN38
Hygienic fittings ≥ DN25 - DIN11864-1-A
Hygienic fittings ≥ DN40 - DIN11864-1-A
Varivent N50-40
SMS DN25
Ingold connection PN10
Varivent F25

Seal material
EPDM
FKM
FFKM

Housing material
Plastic

Protection rating
IP66/IP67
IP65

Output
4 ... 20 mA
Three-wire (PNP/NPN, 4 ... 20 mA)
IO-Link