



### Reliable


Reliable separation of media streams

### Cost effective

Energy savings thanks to heat recovery through reliable measurement

### User friendly

Simple connection via standardised IO-Link

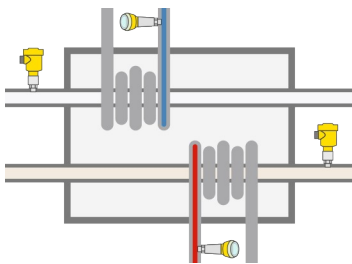

## Heat exchanger

### Pressure measurement during pasteurisation in the heat exchanger

In a plate heat exchanger, the milk is heated up to +85 °C, depending on the process, so that all germs are killed. The milk is heated in multiple sections, kept hot and cooled down again by cold, inflowing milk. This in turn warms up the inflowing milk. Reliable pressure measurement is required to maintain an optimal process in the heat exchanger.

#### More details



### VEGABAR 83

Pressure transmitter for pressure monitoring in the raw milk and pasteurised milk pipelines

- Robust measuring cell guarantees long-term stability
- Suitable for CIP cleaning processes, temperature resistant up to +150 °C
- Bluetooth communication for easy diagnosis

[Show Product](#)



### VEGABAR 38

Pressure sensor with I/O link connection for pressure monitoring in the feed line for the cooling medium

- Simple operation thanks to VDMA menu structure and integrated display
- Ceramic CERTEC® measuring cell is totally resistant to cooling water
- Thanks to the 360° status display, the different operating statuses can be clearly recognised

[Show Product](#)



### VEGABAR 39

Pressure sensor with I/O-Link connection for pressure monitoring in the feed line for the heating medium.

- Reliable measurement thanks to fast response time
- Simple operation thanks to VDMA menu structure and integrated display
- Bluetooth communication for easy diagnosis

[Show Product](#)

## PRO

## BASIC

## BASIC

**VEGABAR 83**  
[Show Product](#)

**Measuring range - Distance**

-

**Measuring range - Pressure**

-1 ... 1000 bar

**Process temperature**

-40 ... 200 °C

**Process pressure**

-1 ... 1000 bar

**Accuracy**

0.075 %

**Materials, wetted parts**

316L  
 Alloy C22 (2.4602)  
 316Ti (1.4571)  
 Alloy C4 (2.4610)

**Threaded connection**

≥ G½, ≥ ½ NPT

**Flange connection**

≥ DN25, ≥ 1"

**Hygienic fittings**

Slotted nut ≥ DN25 - DIN 11851  
 Varivent ≥ DN25  
 hygienic fitting with tension flange DN32  
 Hygienice flange connection ≥ DN50 DIN11864-2  
 SMS 1145 DN51  
 SMS DN38  
 Hygienic fittings ≥ DN33 - DIN11864-1-A  
 Hyg. collar clamp adapter DN40PN40 DIN11864-3-A  
 Hyg. clamp connection DIN11864-3-A; DN50 Rohr ø53  
 Swagelok VCR screwing  
 Varivent G125

**Seal material**

no media contact

**VEGABAR 38**  
[Show Product](#)

**Measuring range - Pressure**

-1 ... 60 bar

**Process temperature**

-40 ... 130 °C

**Accuracy**

0.3 %

**Materials, wetted parts**

PVDF  
 316L  
 Duplex (1.4462)  
 Ceramic

**Threaded connection**

≥ G¾, ≥ ¼ NPT

**Hygienic fittings**

Clamp ≥ 2", DN50 - DIN32676, ISO2852  
 Clamp ≥ 1" - DIN32676, ISO2852  
 Clamp ≥ 1½" - DIN32676, ISO2852  
 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851  
 Slotted nut ≥ DN25 - DIN 11851  
 SMS DN38  
 Hygienic fittings ≥ DN25 - DIN11864-1-A  
 Hygienic fittings ≥ DN40 - DIN11864-1-A  
 Varivent N50-40  
 SMS DN25  
 Ingold connection PN10  
 Varivent F25

**Seal material**

EPDM  
 FKM  
 FFKM

**Housing material**

Plastic

**Protection rating**

IP66/IP67  
 IP65

**Output**

4 ... 20 mA  
 Three-wire (PNP/NPN, 4 ... 20 mA)  
 IO-Link

**VEGABAR 39**  
[Show Product](#)

**Measuring range - Pressure**

-1 ... 1000 bar

**Process temperature**

-40 ... 130 °C

**Accuracy**

0.3 %

**Materials, wetted parts**

316L

**Threaded connection**

≥ G¾, ≥ ¼ NPT

**Hygienic fittings**

Clamp ≥ 2", DN50 - DIN32676, ISO2852  
 Clamp ≥ 1" - DIN32676, ISO2852  
 Clamp ≥ 1½" - DIN32676, ISO2852  
 Slotted nut ≥ DN25 - DIN 11851  
 Slotted nut ≥ DN32 - DIN 11851  
 SMS 1145 DN51  
 SMS DN38  
 Hygienic fittings ≥ DN25 - DIN11864-1-A  
 Hygienic fittings ≥ DN40 - DIN11864-1-A  
 Varivent N50-40  
 SMS DN25  
 Ingold connection PN10  
 Varivent F25

**Housing material**

Plastic

**Protection rating**

IP66/IP67

**Output**

4 ... 20 mA  
 Three-wire (PNP/NPN, 4 ... 20 mA)  
 IO-Link

**Ambient temperature**

-40 ... 70 °C