



Reliable

Redundant measurement increases plant availability and plant safety

Cost effective

Maintenance-free operation

User friendly


Easy installation and setup

Propane bullets

Level measurement in propane bullets

Propane, a flammable, colourless and odourless gas, is one of the many types of liquefied petroleum gases (LPG) that exist. It is produced from natural gas via a special refining process. Propane is compressed, liquefied and stored in pressure vessels so that it does not return to a gaseous state. To ensure optimal storage, reliable level measurement is required.

[More details](#)

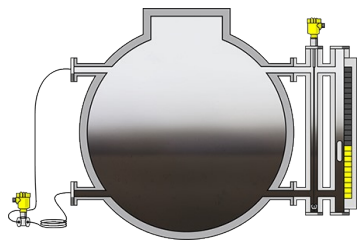

VEGAFLEX 81 and magnetic level indicator

Guided wave radar and magnetic level indicator for reliable level measurement

- Redundant measurement through the combination of guided radar sensor and magnetic level indicator
- Measurement is unaffected by low dielectric constant
- Equipment can be isolated from vessel for service without affecting the process

[Show Product](#)



VEGADIF 85

Differential pressure transmitter for redundant measurement

- High reliability through integrated overload diaphragm
- Measurement of very low differential pressures through high precision measured value detection

[Show Product](#)

PRO

VEGAFLEX 81 and magnetic level indicator[Show Product](#)**Measuring range - Distance**

75 m

Process temperature

-60 ... 200 °C

Process pressure

-1 ... 40 bar

Accuracy

± 2 mm

Version

Basic version for exchangeable cable \varnothing 2; \varnothing 4 mm
 Basic version for exchangeable rod \varnothing 8 mm
 Basic version for exchangeable rod \varnothing 12 mm
 Coax version \varnothing 21.3 mm for ammonia application
 Coax version \varnothing 21.3 mm with single hole
 Coax version \varnothing 21.3 mm with multiple hole
 Coax version \varnothing 42.2 mm with multiple hole
 Exchangeable rod \varnothing 8 mm
 Exchangeable rod \varnothing 12 mm
 Exchangeable cable \varnothing 2 mm with gravity weight
 Exchangeable cable \varnothing 4 mm with gravity weight
 Exchangeable cable \varnothing 2 mm with centering weight
 Exchangeable cable \varnothing 4 mm with centering weight
 Exchangeable cable \varnothing 4 mm without weight
 exchangeable, PFA-coated cable \varnothing 4 mm with non-coated centering weight

Materials, wetted parts

PFA
 316L
 Alloy C22 (2.4602)
 Alloy 400 (2.4360)
 Alloy C276 (2.4819)
 Duplex (1.4462)
 304L

Threaded connection $\geq G\frac{3}{4}$, $\geq \frac{3}{4}$ NPT**Flange connection** $\geq DN25$, $\geq 1"$ **Seal material**

EPDM
 FKM
 FFKM
 Silicone FEP coated
 Borosilicate glass

Housing material

Plastic
 Aluminium

PRO

VEGADIF 85[Show Product](#)**Measuring range - Pressure**

-16 ... 16 bar

Process temperature

-40 ... 105 °C

Process pressure

-1 ... 400 bar

Accuracy

0.065 %

Materials, wetted parts

316L
 Tantalum
 Alloy C276 (2.4819)
 Monel

Threaded connection $\frac{1}{4}$ - 18 NPT**Flange connection** $\geq DN32$, $\geq 1\frac{1}{8}"$ **Seal material**

EPDM
 FKM
 Copper

Housing material

Plastic
 Aluminium
 Stainless steel (precision casting)
 Stainless steel (electropolished)

Protection rating

IP66/IP68 (0,2 bar)
 IP66/IP67
 IP66/IP68 (1 bar)

VEGA

Stainless steel (precision casting)
Stainless steel (electropolished)