



#### Reliable

Dependable measurement even during filling

#### Cost effective

Efficient use of the entire container capacity

#### User friendly


Simple mounting and setup

## Coal surge bin II

### Level measurement and point level detection in the coal surge bin

In a typical coal power plant, lignite (soft coal) and anthracite (hard coal) are stored temporarily in bins up to 30 meters high. To ensure that the coal belts are continuously loaded without interruption, a robust and reliable level measuring system is required. Additional point level detectors are used to prevent any overfilling of the bins.

[More details](#)

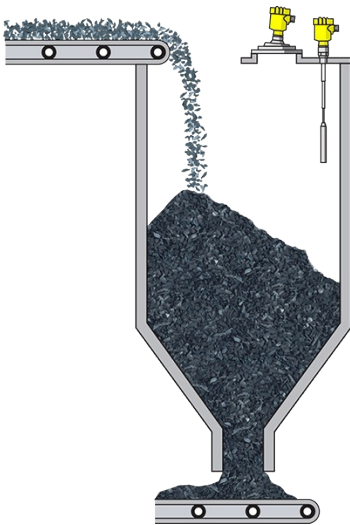

#### VEGAPULS 6X

Non-contact level measurement with radar in the coal surge bin

- Accurate measurement, even in the discharge hopper thanks to small beam angle
- High measurement certainty despite extreme dust generation and buildup
- High operational reliability ensured through noise immunity

[Show Product](#)



#### VEGACAP 65

Capacitive sensor for point level detection in the coal surge bin

- Shortenable probes for high flexibility
- Very long service life and low maintenance requirements through robust design
- Reliable switching point ensured through large sensing weight

[Show Product](#)

PRO

**VEGAPULS 6X**  
[Show Product](#)

**Measuring range - Distance**

120 m

**Process temperature**

-196 ... 450 °C

**Process pressure**

-1 ... 160 bar

**Accuracy**

± 1 mm

**Frequency**

6 GHz

26 GHz

80 GHz

**Beam angle**

≥ 3°

**Materials, wetted parts**

PTFE

PVDF

316L

PP

PEEK

**Threaded connection**

≥ G¾, ≥ ¾ NPT

**Flange connection**

≥ DN20, ≥ ¾"

**Hygienic fittings**

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -

DIN11864-1-A

Hygienice flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe ø53 - DIN11864-

3-A

DRD connection ø 65 mm

SMS 1145 DN51

PRO

**VEGACAP 65**  
[Show Product](#)

**Measuring range - Distance**

-

**Process temperature**

-50 ... 200 °C

**Process pressure**

-1 ... 64 bar

**Version**

Cable ø 6 mm with screening tube without weight

Cable ø 6 mm with screening tube and gravity weight

Cable ø 6 mm with gravity weight

Cable ø 8 mm with abrasion protection without weight

Cable ø 8 mm with abrasion protection and gravity weight

Cable ø 8 mm with gravity weight

PA cable ø 12 mm with screening tube and gravity weight

**Materials, wetted parts**

PTFE

316L

PA

PEEK

Steel

**Threaded connection**

≥ G1, ≥ 1 NPT

**Flange connection**

≥ DN50, ≥ 2"

**Housing material**

Plastic

Aluminium

Stainless steel (precision casting)

Stainless steel (electropolished)

**Protection rating**

IP66/IP68 (0,2 bar)

IP66/IP67

IP66/IP68 (1 bar)

**Output**

Relay (DPDT)

Contactless electronic switch

Transistor (NPN/PNP)

Two-wire

**VEGA**