



#### Reliable

Dependable measurement even during filling

#### Cost effective

Efficient use of the entire container capacity

#### User friendly


Simple mounting and setup

## Coal surge bin II

### Level measurement and point level detection in the coal surge bin

In a typical coal power plant, lignite (soft coal) and anthracite (hard coal) are stored temporarily in bins up to 30 meters high. To ensure that the coal belts are continuously loaded without interruption, a robust and reliable level measuring system is required. Additional point level detectors are used to prevent any overfilling of the bins.

[More details](#)

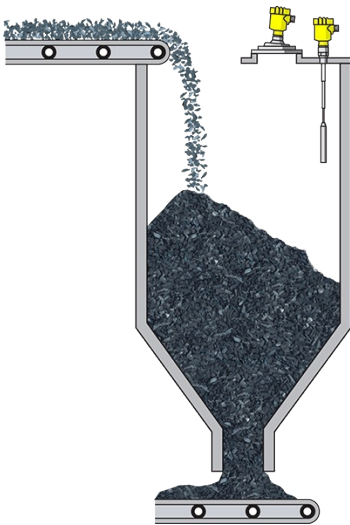

#### VEGAPULS 6X

Non-contact level measurement with radar in the coal surge bin

- Accurate measurement, even in the discharge hopper thanks to small beam angle
- High measurement certainty despite extreme dust generation and buildup
- High operational reliability ensured through noise immunity

[Show Product](#)



#### VEGACAP 65

Capacitive sensor for point level detection in the coal surge bin

- Shortenable probes for high flexibility
- Very long service life and low maintenance requirements through robust design
- Reliable switching point ensured through large sensing weight

[Show Product](#)

PRO

## VEGAPULS 6X

[Show Product](#)



**Measuring range - Distance**  
120 m

**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 160 bar

**Accuracy**  
± 1 mm

**Frequency**  
6 GHz  
26 GHz  
80 GHz

**Beam angle**  
≥ 3°

**Materials, wetted parts**  
PTFE  
PVDF  
316L  
PP  
PEEK

**Threaded connection**  
≥ G¾, ≥ ¾ NPT

**Flange connection**  
≥ DN20, ≥ ¾"

**Hygienic fittings**  
Clamp ≥ 1½" - DIN32676, ISO2852  
Slotted nut ≥ 2", DN50 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting with tension flange DN32  
hygienic fitting F40 with compression nut  
Hygienic screw connections ≥ DN50 tube ø53 -  
DIN11864-1-A  
Hygienic flange connection ≥ DN50 DIN11864-2  
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-  
3-A  
DRD connection ø 65 mm  
SMS 1145 DN51

PRO

## VEGACAP 65

[Show Product](#)



**Measuring range - Distance**  
-

**Process temperature**  
-50 ... 200 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
Cable ø 6 mm with screening tube without weight  
Cable ø 6 mm with screening tube and gravity weight  
Cable ø 6 mm with gravity weight  
Cable ø 8 mm with abrasion protection without weight  
Cable ø 8 mm with abrasion protection and gravity weight  
Cable ø 8 mm with gravity weight  
PA cable ø 12 mm with screening tube and gravity weight

**Materials, wetted parts**  
PTFE  
316L  
PA  
PEEK  
Steel

**Threaded connection**  
≥ G1, ≥ 1 NPT

**Flange connection**  
≥ DN50, ≥ 2"

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP68 (0,2 bar)  
IP66/IP67  
IP66/IP68 (1 bar)

**Output**  
Relay (DPDT)  
Contactless electronic switch  
Transistor (NPN/PNP)  
Two-wire