



Reliable

Simple function test possible even during a running process

Cost effective

Ensures optimal supply of flocculants

User friendly


Simple calibration

Storage tank for flocculant

Level measurement and point level detection in flocculant storage tanks

The finest impurities in the water are bound together through flocculation. This allows the coagulated materials to be removed from the water by sedimentation or filtration. The flocculant required for such operation is stored in a reserve tank. A continuous level measurement ensures a sufficient supply of flocculants. The point level detection serves as overflow protection in the tank.

[More details](#)

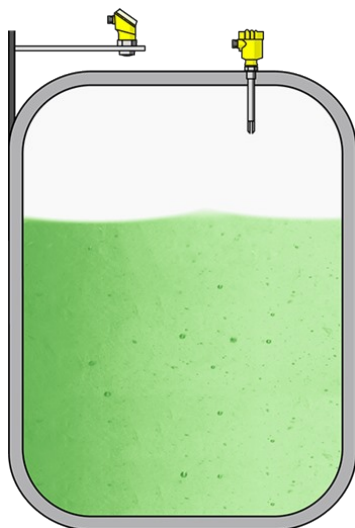

VEGAPULS 31

Flocculant storage tank level measurement with radar

- Maintenance-free operation through non-contact measurement
- Reliable level monitoring through the vessel top, thanks to strong focusing
- Universally applicable for different flocculants

[Show Product](#)



VEGASWING 63

Point level detection with vibrating level switches for overflow protection

- Highly robust materials are resistant to aggressive media
- Fast and reliable function test by simply pressing a button
- Simple setup without adjustment

[Show Product](#)

BASIC

VEGAPULS 31
[Show Product](#)
**Measuring range - Distance**

15 m

Process temperature

-40 ... 80 °C

Process pressure

-1 ... 3 bar

Accuracy

± 2 mm

Frequency

80 GHz

Beam angle

8°

Materials, wetted parts

PVDF

Threaded connection

G1½, 1½ NPT, R1½

Seal material

FKM

Housing material

Plastic

PRO

VEGASWING 63
[Show Product](#)
**Process temperature**

-50 ... 250 °C

Process pressure

-1 ... 64 bar

Version

Standard
 Hygienic applications
 with gas-tight leadthrough
 with tube extension
 with temperature adapter

Materials, wetted parts

PFA
 316L
 Alloy C22 (2.4602)
 Alloy 400 (2.4360)
 ECTFE
 Enamel

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN25, ≥ 1"

Hygienic fittings

Clamp ≥ 1" - DIN32676, ISO2852
 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
 Varivent ≥ DN25
 hygienic fitting F40 with compression nut
 SMS 1145 DN51
 SMS DN38
 Hygienic fittings ≥ DN25 - DIN11864-1-A
 Hygienic flange connection DIN11864-2-A;
 DN60(ISO)ø60,3
 SMS socket piece DN38 PN6

Seal material

no media contact

Housing material

Plastic
 Aluminium
 Stainless steel (precision casting)
 Stainless steel (electropolished)

Protection rating

IP66/IP67
 IP66/IP68 (1 bar)
 IP65