



#### Reliable

Reliable measurement, independent of product characteristics

#### Cost effective

Maintenance-free operation

#### User friendly


Simple setup and commissioning

## Storage tank for liquid raw materials

### Level measurement and point level detection of liquid raw materials in storage tanks

Oils and alkaline solutions are among the liquid raw materials for the mud mixtures. These additives are stored on the drilling platform in special storage tanks. To ensure the continuous production of drilling mud, the level of raw materials in the storage tanks must be exactly monitored.

[More details](#)

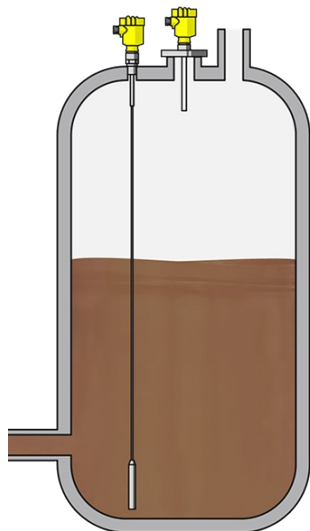

#### VEGAFLEX 81

Level measurement with guided radar in storage tanks for liquid raw materials

- Simple project planning enabled by shortenable rod and cable probes
- Long service life thanks to highly resistant materials
- Non-sensitive to buildup and foam

[Show Product](#)

#### VEGASWING 63

Level switch for detecting the maximum level in the storage tank for liquid raw materials

- Reliable measurement, independent of mud characteristics
- Robust construction ensures a long service life
- Simple setup without adjustment

[Show Product](#)

PRO

## VEGAFLEX 81

[Show Product](#)



### Measuring range - Distance

75 m

### Process temperature

-60 ... 200 °C

### Process pressure

-1 ... 40 bar

### Accuracy

± 2 mm

### Version

Basic version for exchangeable cable  $\varnothing$  2;  $\varnothing$  4 mm  
 Basic version for exchangeable rod  $\varnothing$  8 mm  
 Basic version for exchangeable rod  $\varnothing$  12 mm  
 Coax version  $\varnothing$  21.3 mm for ammonia application  
 Coax version  $\varnothing$  21.3 mm with single hole  
 Coax version  $\varnothing$  21.3 mm with multiple hole  
 Coax version  $\varnothing$  42.2 mm with multiple hole  
 Exchangeable rod  $\varnothing$  8 mm  
 Exchangeable rod  $\varnothing$  12 mm  
 Exchangeable cable  $\varnothing$  2 mm with gravity weight  
 Exchangeable cable  $\varnothing$  4 mm with gravity weight  
 Exchangeable cable  $\varnothing$  2 mm with centering weight  
 Exchangeable cable  $\varnothing$  4 mm with centering weight  
 Exchangeable cable  $\varnothing$  4 mm without weight  
 exchangeable, PFA-coated cable  $\varnothing$  4 mm with non-coated centering weight

### Materials, wetted parts

PFA  
 316L  
 Alloy C22 (2.4602)  
 Alloy 400 (2.4360)  
 Alloy C276 (2.4819)  
 Duplex (1.4462)  
 304L

### Threaded connection

≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

### Flange connection

≥ DN25, ≥ 1"

### Seal material

EPDM  
 FKM  
 FFKM  
 Silicone FEP coated  
 Borosilicate glass

### Housing material

Plastic  
 Aluminium

PRO

## VEGASWING 63

[Show Product](#)



### Process temperature

-50 ... 250 °C

### Process pressure

-1 ... 64 bar

### Version

Standard  
 Hygienic applications  
 with gas-tight leadthrough  
 with tube extension  
 with temperature adapter

### Materials, wetted parts

PFA  
 316L  
 Alloy C22 (2.4602)  
 Alloy 400 (2.4360)  
 ECTFE  
 Enamel

### Threaded connection

≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

### Flange connection

≥ DN25, ≥ 1"

### Hygienic fittings

Clamp ≥ 1" - DIN32676, ISO2852  
 Slotted nut ≥ 1 $\frac{1}{2}$ ", ≥ DN40 - DIN 11851  
 Varivent ≥ DN25  
 hygienic fitting F40 with compression nut  
 SMS 1145 DN51  
 SMS DN38  
 Hygienic fittings ≥ DN25 - DIN11864-1-A  
 Hygienic flange connection DIN11864-2-A;  
 DN60(ISO) $\varnothing$ 60,3  
 SMS socket piece DN38 PN6

### Seal material

no media contact

### Housing material

Plastic  
 Aluminium  
 Stainless steel (precision casting)  
 Stainless steel (electropolished)

### Protection rating

IP66/IP67  
 IP66/IP68 (1 bar)  
 IP65

Stainless steel (precision casting)  
Stainless steel (electropolished)