



Reliable

Approved materials according to FDA and EC 1935/2004 regulations as well as country-specific approvals

Cost effective

Efficient cleaning of the filter during continuous operation

User friendly

Maintenance friendly through front-flush mounting

Reverse osmosis

Differential pressure measurement in reverse osmosis

When transporting live fish, the operators of aqua farms do everything in their power to carry out the task as efficiently, gently and stress-free (for the fish) as possible, usually with the help of special ships. Large amounts of water are required to maintain the water quality in the tanks during transport. The seawater is forced through a semi-permeable diaphragm under high pressure. Only pure water molecules can pass through. Differential pressure measurement monitors the level of contamination of the filter.

[More details](#)




VEGADIF 85

Differential pressure transmitter for measuring filter contamination

- Measurement of extremely small differential pressures through high-precision measured value detection
- High reliability thanks to integrated overload diaphragm
- Multi-variable measurement via integrated sensor for measurement of static pressure

[Show Product](#)

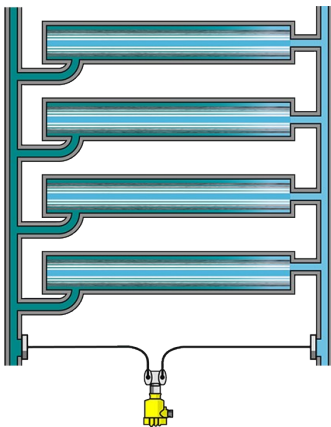

VEGADIF 85
[Show Product](#)**Measuring range - Pressure**

-16 ... 16 bar

Process temperature

-40 ... 105 °C

Process pressure

-1 ... 400 bar

Accuracy

0.065 %

Materials, wetted parts

316L

Tantalum

Alloy C276 (2.4819)

Monel

Threaded connection

¼ - 18 NPT

Flange connection

≥ DN32, ≥ 1½"

Seal material

EPDM

FKM

Copper

Housing material

Plastic

Aluminium

Stainless steel (precision casting)

Stainless steel (electropolished)

Protection rating

IP66/IP68 (0,2 bar)

IP66/IP67

IP66/IP68 (1 bar)