



Wet deslagger

Reliable

Reliable function despite abrasive

Cost effective

Automatic operation ensures optimum level at all times

User friendly

Maintenance-free operation

Level measurement in the wet deslagger


The hot, burned-out slag falls into the water quenching bath of the deslagger. A mechanical discharge mechanism pushes the slag out and, while doing so, presses out most of the entrained water. Evaporation and slag removal cause a steady loss of water. For that reason the water level in the deslagger has to be measured and replenished as required.



VEGAPULS 64

Level measurement with radar in the wet deslagger

- Precise measurement of small level differences
- Non-contact measurement unaffected by abrasion
- Exact measurement results even with density changes

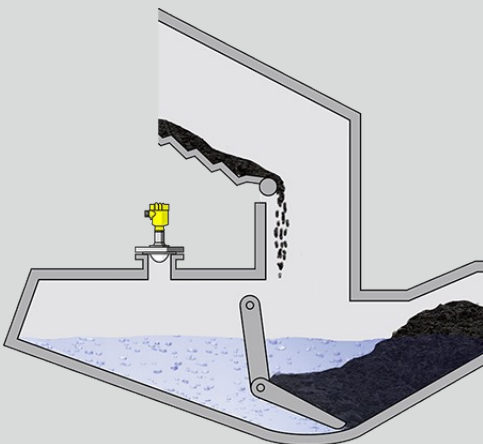



VEGAPULS 64

Measuring range - Distance

30 m

Process temperature

-196 ... 200 °C

Process pressure

-1 ... 25 bar

Accuracy

± 1 mm

Frequency

80 GHz

Beam angle

≥ 3°

Version

with plastic horn antenna ø 80 mm

Thread with integrated horn antenna

Flange with encapsulated antenna system

Hygienic fitting with encapsulated antenna system

Materials, wetted parts

PFA

PTFE

316L

Alloy C22 (2.4602)

PEEK

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN50, ≥ 2"