

#### Reliable

Configuration of the measuring system ensures maximum safety for people and the environment

#### Cost effective

High availability and maintenance-free operation

#### User friendly


Fast installation and simple setup

## Storage tanks for toxic liquids

### Level measurement and point level detection in toxic liquids storage

Some chemical processes generate extremely toxic intermediates that have to be stored under the most stringent security measures. In order to be used in this application, the measurement technology must meet specific requirements in terms of design and functional reliability. A redundant sealing concept, an optional glass feedthrough (Second Line of Defense) and highly resistant materials provide the necessary security for the storage and processing of toxic media.

[More details](#)

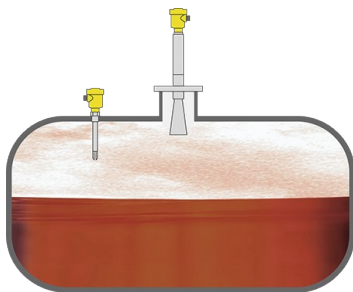

#### VEGAPULS 6X

Continuous level measurement with radar in the storage tank for toxic media

- Non-contact measuring principle is independent of media properties
- Maximum safety with toxic media, thanks to ceramic process separation and additional glass sealing
- Highly resistant materials ensure a long service life
- Maintenance-free operation

[Show Product](#)



#### VEGASWING 63

Vibrating level switch for point level detection in the storage tank for toxic media

- Universally applicable for almost all liquids
- Additional safety through glass seal that ensures even better separation from the process (Second Line of Defense)
- Simple setup without calibration
- Test button for easy testing of instrument functionality during operation

[Show Product](#)

PRO

## VEGAPULS 6X

[Show Product](#)



**Measuring range - Distance**  
120 m

**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 160 bar

**Accuracy**  
± 1 mm

**Frequency**  
6 GHz  
26 GHz  
80 GHz

**Beam angle**  
≥ 3°

**Materials, wetted parts**  
PTFE  
PVDF  
316L  
PP  
PEEK

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN20, ≥  $\frac{3}{4}$ "

**Hygienic fittings**  
Clamp ≥ 1 $\frac{1}{2}$ " - DIN32676, ISO2852  
Slotted nut ≥ 2", DN50 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting with tension flange DN32  
hygienic fitting F40 with compression nut  
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A  
Hygienic flange connection ≥ DN50 DIN11864-2  
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A  
DRD connection ø 65 mm  
SMS 1145 DN51

PRO

## VEGASWING 63

[Show Product](#)



**Process temperature**  
-50 ... 250 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
Standard  
Hygienic applications  
with gas-tight leadthrough  
with tube extension  
with temperature adapter

**Materials, wetted parts**  
PFA  
316L  
Alloy C22 (2.4602)  
Alloy 400 (2.4360)  
ECTFE  
Enamel

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Hygienic fittings**  
Clamp ≥ 1" - DIN32676, ISO2852  
Slotted nut ≥ 1 $\frac{1}{2}$ ", ≥ DN40 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting F40 with compression nut  
SMS 1145 DN51  
SMS DN38  
Hygienic fittings ≥ DN25 - DIN11864-1-A  
Hygienic flange connection DIN11864-2-A;  
DN60(ISO)ø60,3  
SMS socket piece DN38 PN6

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP67  
IP66/IP68 (1 bar)  
IP65