



Reliable

Measurement results are unaffected by process conditions

Cost effective

Efficient operation and high oil quality

User friendly


Maintenance-free operation

Oil separators

Level and pressure measurement in an oil separator

The separator vessel contains a mixture of crude oil, gas, water and sand extracted from the subsea well. Precise monitoring of these multiple separation interfaces and emulsions play a vital role in ensuring the quality of the oil separator for separation. Exact control of interfaces, level and pressure allows optimum utilization of the oil separator and increases the effectiveness of the entire asset.

[More details](#)

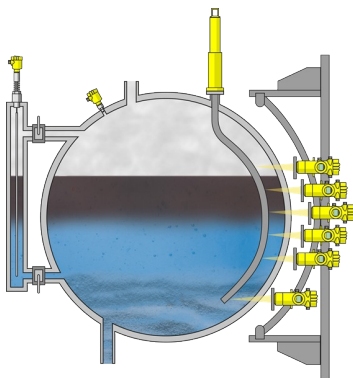

VEGAFLEX 86

Level measurement with guided radar in the oil separator

- Independent of medium density and therefore highly accurate
- Doubly secure thanks to the "Second Line of Defense"
- Shortenable rod probe allows high flexibility during planning

[Show Product](#)



VEGABAR 83

Pressure transmitter for monitoring pressure in the oil separator

- High plant availability due to high overload resistance
- High resistance of the measuring cell ensures a long service life
- Small process fitting reduces installation costs

[Show Product](#)



MINITRAC 31

Radiometric multi-phase interface measurement in the oil separator

- High process transparency through accurate detection of separation layers
- Ensures continuous operation of the facility through non-contact measuring method
- Measurement unaffected by pressure and temperature because sensor is installed outside of the tank

[Show Product](#)



PRO

VEGAFLEX 86
[Show Product](#)

Measuring range - Distance
 75 m

Process temperature
 -196 ... 450 °C

Process pressure
 -1 ... 400 bar

Accuracy
 ± 2 mm

Version
 Coax version ø 21.3 mm with multiple hole
 Coax version ø 42.2 mm with single hole
 Coax version ø 42.2 mm with multiple hole
 Exchangeable rod ø 16 mm
 Exchangeable cable ø 2 mm with gravity weight
 Exchangeable cable ø 4 mm with gravity weight
 Exchangeable cable ø 2 mm with centering weight
 Exchangeable cable ø 4 mm with centering weight

Materials, wetted parts
 316L
 Alloy C22 (2.4602)
 316

Threaded connection
 ≥ G¾, ≥ ¼ NPT

Flange connection
 ≥ DN25, ≥ 1"

Seal material
 FFKM
 graphit and ceramic

Housing material
 Plastic
 Aluminium
 Stainless steel (precision casting)
 Stainless steel (electropolished)

PRO

VEGABAR 83
[Show Product](#)

Measuring range - Distance
 -

Measuring range - Pressure
 -1 ... 1000 bar

Process temperature
 -40 ... 200 °C

Process pressure
 -1 ... 1000 bar

Accuracy
 0.075 %

Materials, wetted parts
 316L
 Alloy C22 (2.4602)
 316Ti (1.4571)
 Alloy C4 (2.4610)

Threaded connection
 ≥ G½, ≥ ½ NPT

Flange connection
 ≥ DN25, ≥ 1"

Hygienic fittings
 Slotted nut ≥ DN25 - DIN 11851
 Varivent ≥ DN25
 hygienic fitting with tension flange DN32
 Hygienice flange connection ≥ DN50 DIN11864-2
 SMS 1145 DN51
 SMS DN38
 Hygienic fittings ≥ DN33 - DIN11864-1-A
 Hyg. collar clamp adapter DN40PN40 DIN11864-3-A
 Hyg. clamp connection DIN11864-3-A; DN50 Rohr ø53
 Swagelok VCR screwing
 Varivent G125

Seal material
 no media contact

PRO

MINITRAC 31
[Show Product](#)

Measuring range - Distance
 -

Process temperature
 -40 ... 60 °C

Process pressure
 -

Accuracy
 0.1 %

Materials, wetted parts
 No wetted material

Seal material
 no media contact

Housing material
 Aluminium
 Stainless steel (precision casting)

Protection rating
 IP66/IP67

Output
 Profibus PA
 Foundation Fieldbus
 4 ... 20 mA/HART - four-wire

Ambient temperature
 -40 ... 60 °C