

Reliable

Optimal concentration thanks to highly accurate level measurement

Cost effective

Easy cleaning without dismantling

User friendly


Simple installation and setup

Vacuum evaporator with scraper system

Level measurement in a vacuum evaporator with scraper system and pressure monitoring in the supply line

A thickening vessel fitted with a scraper is used to increase the concentration of extracted solutions by means of evaporation under vacuum. Extremely precise level measurement is required in this process because the concentration is determined by the filling height. The evaporation system operates according to meeting specified levels. As soon as they reach the correct value, the evaporation process is stopped and the concentrated solution is discharged out of the tank.

[More details](#)

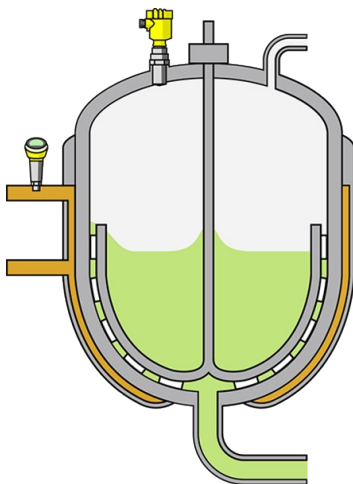

VEGABAR 38

Pressure monitoring with IO-Link connection in the supply line of the heating medium

- Reliable measurement thanks to fast response time
- Robust ceramic CERTEC® measuring cell guarantees a long service life
- Simple operation thanks to VDMA menu structure and integrated display

[Show Product](#)



VEGAPULS 6X

Vacuum evaporator level measurement with non-contact radar

- Measurement down to the bottom of the vessel thanks to tight signal focusing
- Reliable measurement, unaffected by vessel internals due to high dynamic range
- Encapsulated antenna system, insensitive to condensation and buildup
- The front-flush, encapsulated antenna is easy to clean and resistant to the extreme conditions of the CIP and SIP processes

[Show Product](#)

BASIC

PRO

VEGABAR 38
[Show Product](#)
**Measuring range - Pressure**

-1 ... 60 bar

Process temperature

-40 ... 130 °C

Accuracy

0.3 %

Materials, wetted parts

PVDF
 316L
 Duplex (1.4462)
 Ceramic

Threaded connection≥ G $\frac{1}{2}$, ≥ $\frac{1}{2}$ NPT**Hygienic fittings**

Clamp ≥ 2", DN50 - DIN32676, ISO2852
 Clamp ≥ 1" - DIN32676, ISO2852
 Clamp ≥ 1½" - DIN32676, ISO2852
 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
 Slotted nut ≥ DN25 - DIN 11851
 SMS DN38
 Hygienic fittings ≥ DN25 - DIN11864-1-A
 Hygienic fittings ≥ DN40 - DIN11864-1-A
 Varivent N50-40
 SMS DN25
 Ingold connection PN10
 Varivent F25

Seal material

EPDM
 FKM
 FFKM

Housing material

Plastic

Protection rating

IP66/IP67
 IP65

Output

4 ... 20 mA
 Three-wire (PNP/NPN, 4 ... 20 mA)
 IO-Link

VEGAPULS 6X
[Show Product](#)
**Measuring range - Distance**

120 m

Process temperature

-196 ... 450 °C

Process pressure

-1 ... 160 bar

Accuracy

± 1 mm

Frequency

6 GHz
 26 GHz
 80 GHz

Beam angle

≥ 3°

Materials, wetted parts

PTFE
 PVDF
 316L
 PP
 PEEK

Threaded connection≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT**Flange connection**≥ DN20, ≥ $\frac{3}{4}$ "**Hygienic fittings**

Clamp ≥ 1½" - DIN32676, ISO2852
 Slotted nut ≥ 2", DN50 - DIN 11851
 Varivent ≥ DN25
 hygienic fitting with tension flange DN32
 hygienic fitting F40 with compression nut
 Hygienic screw connections ≥ DN50 tube ø53 -
 DIN11864-1-A
 Hygienic flange connection ≥ DN50 DIN11864-2
 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-
 3-A
 DRD connection ø 65 mm
 SMS 1145 DN51