



Reliable

Approved materials according to FDA and EC 1935/2004 regulations as well as country-specific approvals

Cost effective

Efficient cleaning of the filter during continuous operation

User friendly

Maintenance friendly through front-flush mounting

Osmosis filter

Differential pressure measurement on the osmosis filter

The seawater is forced through a semi-permeable diaphragm under high pressure. Only pure water molecules can pass through. Salts, bacteria and viruses are retained in the filter. The resulting water is almost like distilled water, which can be used for hydrogen electrolysis. Differential pressure measurement monitors the level of contamination of the filter.

More details



VEGADIF 85

Differential pressure transmitter for measuring filter contamination

- Measurement of extremely small differential pressures through high-precision measured value detection
- High reliability thanks to integrated overload diaphragm
- Multi-variable measurement via integrated sensor for measurement of static pressure

Show Product



VEGADIS 81

External display and adjustment unit for 4 ... 20 mA/HART sensors

- Simple display supply via existing 4 ... 20 mA current loop
- Easy-to-read display with plain text and graphics
- Simple operation via four keys and clearly structured menu

Show Product





Mounting bracket for VEGADIF

Mounting bracket for differential pressure transmitter

- Weatherproof and robust 304 stainless steel construction
- Simple wall or pipe mounting

Show Product

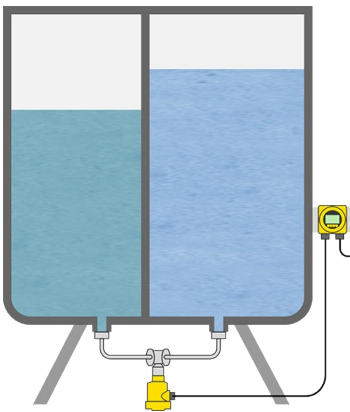

VEGADIF 85 Show Product

Measuring range - Pressure -40 ... 40 bar
Process temperature -40 ... 105 °C
Process pressure -1 ... 400 bar
Accuracy 0.065 %
Materials, wetted parts 316L Tantalum Alloy C276 (2.4819) Monel
Threaded connection ¼ - 18 NPT
Flange connection ≥ DN32, ≥ 1½"
Seal material EPDM FKM Copper
Housing material Plastic Aluminium Stainless steel (precision casting) Stainless steel (electropolished)
Protection rating IP66/IP68 (0,2 bar) IP66/IP67 IP66/IP68 (1 bar)

VEGADIS 81 Show Product

Housing material Plastic Aluminium Stainless steel (precision casting)
Protection rating IP66/IP67
Ambient temperature -20 ... 70 °C
Signal input (specify) plics sensor (serial)
Signal output (specify) Display

Mounting bracket for VEGADIF Show Product
