



Reliable

Consistent measuring results in any weather

Cost effective

Maintenance-free operation

User friendly


Simple installation on existing infrastructure

Coke stacker

Stockpile monitoring

After the coke is extracted from the drums it is stored in silos or stockpiles. Reliable level measurement is an absolute must for automating the stockpiling process and ensuring optimal levels.

[More details](#)

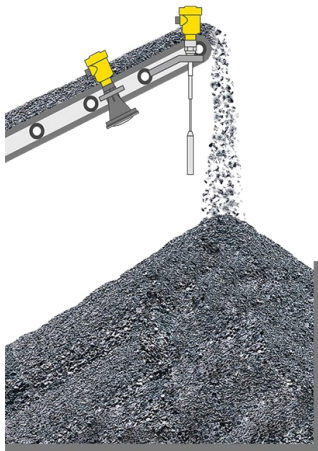

VEGAPULS 6X

Radar sensor for level measurement in the coke stacker

- Non-contact, maintenance-free measurement
- High measurement certainty despite intense dust and noise generation
- Absolute operational reliability, even in rain and snow
- Simple mounting and setup

[Show Product](#)



VEGACAP 65

Capacitive cable probe for level detection in the coke stacker

- Shortenable probes enable high flexibility
- Long service life and low maintenance requirements through robust design
- Reliable switching point ensured through large sensing weight

[Show Product](#)

PRO

VEGAPULS 6X

[Show Product](#)



Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN20, ≥ ¾"

Hygienic fittings
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 -
DIN11864-1-A
Hygienic flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A
DRD connection ø 65 mm
SMS 1145 DN51

PRO

VEGACAP 65

[Show Product](#)



Measuring range - Distance
-

Process temperature
-50 ... 200 °C

Process pressure
-1 ... 64 bar

Version
Cable ø 6 mm with screening tube without weight
Cable ø 6 mm with screening tube and gravity weight
Cable ø 6 mm with gravity weight
Cable ø 8 mm with abrasion protection without weight
Cable ø 8 mm with abrasion protection and gravity weight
Cable ø 8 mm with gravity weight
PA cable ø 12 mm with screening tube and gravity weight

Materials, wetted parts
PTFE
316L
PA
PEEK
Steel

Threaded connection
≥ G1, ≥ 1 NPT

Flange connection
≥ DN50, ≥ 2"

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP68 (0,2 bar)
IP66/IP67
IP66/IP68 (1 bar)

Output
Relay (DPDT)
Contactless electronic switch
Transistor (NPN/PNP)
Two-wire