



#### Reliable

Reliable measurement despite joints and deposits in the bypass tube

#### Cost effective

Precise measurement for efficient operation of the reactor

#### User friendly


Simple installation and setup

## Stripping column for landfill leachate

### Level measurement in a stripping column

In the stripping column process, the nitrogen and carbon compounds are decomposed by various microorganisms. Special carrier materials are packed in the central part of the reactor, which improve the biochemical reaction processes. To ensure an optimal operating point inside the stripping column, an exact level measurement at the base of the column is required. Because the surface of the medium in the reactor is very turbulent due to air flowing in from below, the level measurement has to be carried out in a bypass tube.

[更多细节](#)

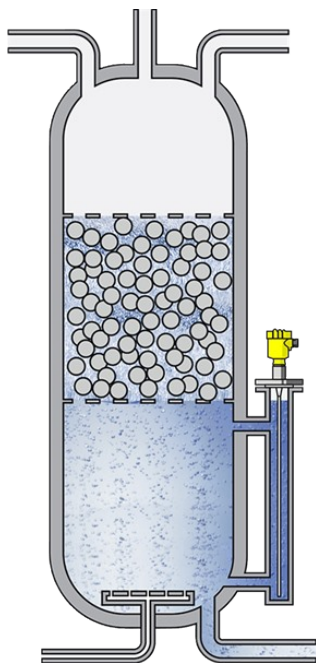

### VEGAFLEX 83

Level measurement with guided radar inside the bypass tube of the stripping column

- Reliable and accurate measurement, even under difficult process conditions, including changing product properties
- Easy retrofit to existing installations
- Easy setup and commissioning without full and empty adjustment

[产品细节](#)

## VEGAFLEX 83

## 产品细节

**量程 - 距离**

32 m

**过程温度**

-40 ... 150 °C

**过程压力**

-1 ... 16 bar

**测量精度**

± 2 mm

**型式**

Rod ø 10 mm, PFA-coated

Exchangeable rod ø 8 mm, polished

Exchangeable rod ø 8 mm, electropolished

Exchangeable rod ø 8 mm, electropolished, can be

autoclaved

Cable ø 4 mm with gravity weight, PFA-coated

**接液材质**

PFA

316L

TFM-PTFE

**法兰连接**

≥ DN25, ≥ 1"

**卫生型连接**

Clamp ≥ 2", DN50 - DIN32676, ISO2852

Clamp ≥ 3", DN65 - DIN32676, ISO2852

管螺栓 ≥ 1½", ≥ DN40 - DIN 11851

管螺栓 ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

Hygienice flange connection ≥ DN50 DIN11864-2

Swagelok VCR screwing

Hygienic collar clamp ≥ DN33 - DIN 11864-3

Safety ingold

**密封材料**

EPDM

FKM

FEPM

**外壳材料**

塑料

铝Aluminium

不锈钢, 精密铸件

不锈钢, 经电解抛光