

#### Reliable

Reliable measurement, unaffected by media properties

#### Cost effective

Long service life ensures uninterrupted operation for extended periods

#### User friendly


Non-contact measurement through glass

## Agitating tank

### Level measurement and point level detection in an agitating tank

In the pharmaceutical industry, numerous liquids with widely different properties are required. Liquid intermediate products must be made available and held ready for further processes. To ensure smooth, continuous production, reliable level measurement and point level detection are essential.

[More details](#)

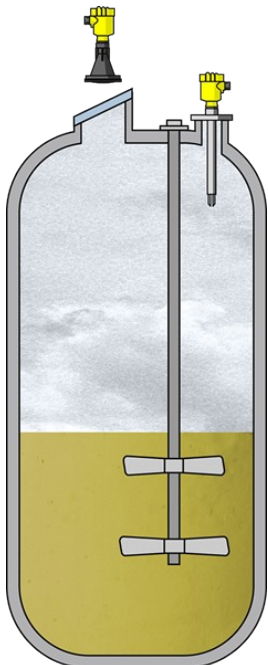

#### VEGAPULS 6X

Non-contact level measurement with radar in agitating tanks for raw and intermediate products

- Reliable measurement through inspection glass, independent of medium
- Wide dynamic range allows measurement even with slightly slanted windows
- Instrument ensures consistently reliable measurement, unaffected by temperature fluctuations and gas phases

[Show Product](#)



#### VEGASWING 63

Point level detection with vibrating level switches in agitating tanks for raw and intermediate products

- Level detector for all liquid media, regardless of viscosity
- Thanks to the exact switching point, the entire container capacity can be utilized and efficient production ensured despite changing media
- Simple setup and commissioning

[Show Product](#)

PRO

**VEGAPULS 6X**  
[Show Product](#)

**Measuring range - Distance**  
 120 m

**Process temperature**  
 -196 ... 450 °C

**Process pressure**  
 -1 ... 160 bar

**Accuracy**  
 ± 1 mm

**Frequency**  
 6 GHz  
 26 GHz  
 80 GHz

**Beam angle**  
 ≥ 3°

**Materials, wetted parts**  
 PTFE  
 PVDF  
 316L  
 PP  
 PEEK

**Threaded connection**  
 ≥ G¾, ≥ ¾ NPT

**Flange connection**  
 ≥ DN20, ≥ ¾"

**Hygienic fittings**  
 Clamp ≥ 1½" - DIN32676, ISO2852  
 Slotted nut ≥ 2", DN50 - DIN 11851  
 Varivent ≥ DN25  
 hygienic fitting with tension flange DN32  
 hygienic fitting F40 with compression nut  
 Hygienic screw connections ≥ DN50 tube ø53 -  
 DIN11864-1-A  
 Hygienic flange connection ≥ DN50 DIN11864-2  
 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-  
 3-A  
 DRD connection ø 65 mm  
 SMS 1145 DN51

PRO

**VEGASWING 63**  
[Show Product](#)

**Process temperature**  
 -50 ... 250 °C

**Process pressure**  
 -1 ... 64 bar

**Version**  
 Standard  
 Hygienic applications  
 with gas-tight leadthrough  
 with tube extension  
 with temperature adapter

**Materials, wetted parts**  
 PFA  
 316L  
 Alloy C22 (2.4602)  
 Alloy 400 (2.4360)  
 ECTFE  
 Enamel

**Threaded connection**  
 ≥ G¾, ≥ ¾ NPT

**Flange connection**  
 ≥ DN25, ≥ 1"

**Hygienic fittings**  
 Clamp ≥ 1" - DIN32676, ISO2852  
 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851  
 Varivent ≥ DN25  
 hygienic fitting F40 with compression nut  
 SMS 1145 DN51  
 SMS DN38  
 Hygienic fittings ≥ DN25 - DIN11864-1-A  
 Hygienic flange connection DIN11864-2-A;  
 DN60(ISO)ø60,3  
 SMS socket piece DN38 PN6

**Seal material**  
 no media contact

**Housing material**  
 Plastic  
 Aluminium  
 Stainless steel (precision casting)  
 Stainless steel (electropolished)

**Protection rating**  
 IP66/IP67  
 IP66/IP68 (1 bar)  
 IP65