



#### Reliable

Certified materials according to FDA and EC  
1935/2004 regulations

#### Cost effective

Maintenance-free operation

#### User friendly


Simple mounting

## Cleaning agent storage tank of the CIP system

### Level measurement and point level detection in the cleaning agent storage tank of the CIP system

The cleaning of process equipment in the food industry takes place within the framework of validated "Cleaning in Place (CIP)" processes that ensure aseptic conditions in production tanks. Sodium hydroxide or concentrated acid are frequently used as cleaning agents, which are stored in the storage tank of the CIP system and diluted in the production vessel. Level measurement enables optimal storage of these cleaning agents. Point level detection serves as overflow and dry run protection.

[More details](#)

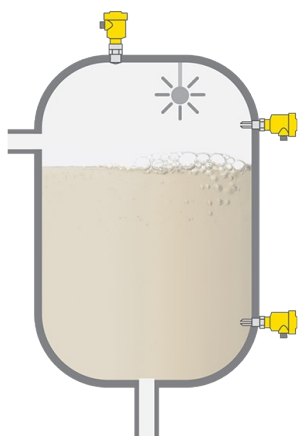

#### VEGAPULS 6X

Radar sensor for continuous level measurement in the cleaning agent storage tank

- Very good focusing with small beam angle of only 4°
- Reliable measurement, unaffected by condensate formation
- Long service life thanks to high chemical resistance

[Show Product](#)





#### VEGASWING 61

Vibrating level switch as overflow and dry run protection

- Reliable detection of the limit level, independent of medium
- Enamel coating ensures long service life of sensor
- Simple setup without adjustment

[Show Product](#)

| PRO   | PRO  |
|---|--|
| <b>VEGAPULS 6X</b><br><a href="#">Show Product</a>  | <b>VEGASWING 61</b><br><a href="#">Show Product</a>  |
|    |   |
| <b>Measuring range - Distance</b><br>120 m  | <b>Measuring range - Distance</b><br>-   |
| <b>Process temperature</b><br>-196 ... 450 °C   | <b>Process temperature</b><br>-50 ... 250 °C   |
| <b>Process pressure</b><br>-1 ... 160 bar   | <b>Process pressure</b><br>-1 ... 64 bar   |
| <b>Accuracy</b><br>± 1 mm   | <b>Version</b><br>Standard<br>Hygienic applications<br>with gas-tight leadthrough<br>with temperature adapter  |
| <b>Frequency</b><br>6 GHz<br>26 GHz<br>80 GHz   | <b>Materials, wetted parts</b><br>PFA<br>316L<br>Alloy C22 (2.4602)<br>Alloy 400 (2.4360)<br>ECTFE<br>Enamel   |
| <b>Beam angle</b><br>≥ 3°   | <b>Threaded connection</b><br>≥ G¾, ≥ ¾ NPT  |
| <b>Materials, wetted parts</b><br>PTFE<br>PVDF<br>316L<br>PP<br>PEEK  | <b>Flange connection</b><br>≥ DN25, ≥ 1"   |
| <b>Threaded connection</b><br>≥ G¾, ≥ ¾ NPT   | <b>Hygienic fittings</b><br>Clamp ≥ 1" - DIN32676, ISO2852<br>Slotted nut ≥ 1½", ≥ DN40 - DIN 11851<br>Varivent ≥ DN25<br>hygienic fitting F40 with compression nut<br>SMS 1145 DN51<br>SMS DN38<br>Hygienic fittings ≥ DN25 - DIN11864-1-A<br>Hygienic flange connection DIN11864-2-A;<br>DN60(ISO)ø60,3<br>SMS socket piece DN38 PN6 |
| <b>Flange connection</b><br>≥ DN20, ≥ ¾"  | <b>Seal material</b><br>no media contact   |
| <b>Hygienic fittings</b><br>Clamp ≥ 1½" - DIN32676, ISO2852<br>Slotted nut ≥ 2", DN50 - DIN 11851<br>Varivent ≥ DN25<br>hygienic fitting with tension flange DN32<br>hygienic fitting F40 with compression nut<br>Hygienic screw connections ≥ DN50 tube ø53 -<br>DIN11864-1-A<br>Hygienic flange connection ≥ DN50 DIN11864-2<br>Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A<br>DRD connection ø 65 mm<br>SMS 1145 DN51 | <b>Housing material</b><br>Plastic<br>Aluminium<br>Stainless steel (precision casting)<br>Stainless steel (electropolished)  |